



Proposed Residential
Subdivision – Kurrajong
Estate, Stage 5
Site Classification

Cockatoo Close, Scone

NEW23P-0038-AA
14 April 2023


Qualitest

LABORATORY (NSW) PTY LTD

14 April 2023

McCloy Project Management Pty Ltd
Suite 2, Ground Floor, 317, Hunter Street,
NEWCASTLE NSW 2309

Attention: Mr Rylan Gibson

Dear Rylan,


**RE: PROPOSED RESIDENTIAL SUBDIVISION – KURRAJONG ESTATE, STAGE 5
COCKATOO CLOSE, SCONE
SITE CLASSIFICATION (LOTS 501 TO 516)**

Please find enclosed our geotechnical report for Stage 5 of the 'Kurrajong Estate' residential subdivision, located at Cockatoo Close, Scone.

The report includes recommendations for Site Classification in accordance with AS2870-2011, "*Residential Slabs and Footings*".

If you have any questions regarding this report, please do not hesitate to contact Ben Bunting, Shannon Kelly, or the undersigned.

For and on behalf of Qualtest Laboratory (NSW) Pty Ltd

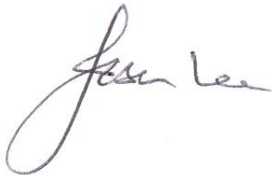

Jason Lee
Principal Geotechnical Engineer

Table of Contents:

1.0	Introduction	1
2.0	Field Work	1
3.0	Site Description	1
3.1	Surface Conditions	1
3.2	Subsurface Conditions.....	3
4.0	Laboratory Testing	4
5.0	Site Classification to AS2870-2011	5
6.0	Limitations.....	7

Attachments:

- Figure AA1: Site Plan and Approximate Test Locations
- Appendix A: Results of Field Investigations
- Appendix B: Results of Laboratory Testing
- Appendix C: CSIRO Sheet BTF 18

1.0 Introduction

Qualtest Laboratory NSW Pty Ltd (Qualtest) is pleased to present this geotechnical report to McCloy Project Management Pty Ltd (McCloy) for Stage 5 of the 'Kurrajong Estate' residential subdivision, located at Cockatoo Close, Scone.

Based on the brief and plans provided by the client, Stage 5 is understood to include 16 residential lots (Lots 501 to 516), as shown on the attached Figure AA1.

The scope of work included providing Site Classification in accordance with AS2870-2011, "*Residential Slabs and Footings*".

This report presents the results of the field work investigations and laboratory testing and provides recommendations for the scope outlined above.

2.0 Field Work

The field work investigations were carried out on 13 March 2023, and comprised of:

- □ DBYD search was undertaken to check proposed test locations for the presence of underground services;
- □ Site walkover to make observations of surface features at the property and in the immediate surrounding area;
- □ Drilling of ten boreholes (BH501 to BH510) using a 2.7 tonne excavator equipped with 300mm diameter auger to depths of 3.50m;
- □ Undisturbed samples (U50 tubes) and disturbed samples were taken for subsequent laboratory testing; and,
- □ Boreholes were backfilled with the excavation spoil and compacted using the excavator auger and tracks.

Investigations were carried out by an experienced Geotechnical Engineer from Qualtest who located the boreholes, carried out the testing and sampling, produced field logs of the boreholes, and made observations of the site surface conditions.

Engineering logs of the boreholes are presented in Appendix A. Approximate borehole locations are shown on the attached Figure AA1. Boreholes were located in the field by handheld GPS and relative to existing site features including lot boundaries.

3.0 Site Description

3.1 Surface Conditions

The site of Kurrajong Estate – Stage 5 is located at Cockatoo Close, off Ibis Place, Scone. The site is generally bounded by low density residential allotments containing recently constructed dwellings to the south and east, by undeveloped grasslands to the west, and by Scone Memorial Airport to the north.

At the time of the site investigation, trafficability by way of 4WD vehicle was good by means of sealed pavements (Cockatoo Close). The site was judged to generally be moderately to well drained by way of surface runoff to installed stormwater systems.

Selected photographs of the site taken on the day of the site investigation are shown below.



Photograph 1: From near eastern boundary of Lot 501, facing west. □



Photograph 2: From near eastern boundary of Lot 501, facing north. □



Photograph 3: From near north-western corner of Lot 508, facing east. □



Photograph 4: From near north-western corner of Lot 508, facing south. □



Photograph 5: From near north-western corner of Lot 510, facing east. □



Photograph 6: From near north-western corner of Lot 510, facing south. □



Photograph 7: From near western boundary of Lot 516, facing north. □



Photograph 8: From near western boundary of Lot 516, facing east. □

3.2 Subsurface Conditions

Reference to the 1:250,000 Singleton Geological Series Sheet indicates the site to be underlain by the Singleton Coal Measures, which is characterised by Sandstone, Shale, Mudstone, and Conglomerate rock types with some coal seams.

Table 1 presents a summary of the typical soil and rock types encountered at the borehole locations during the field investigation, divided into representative geotechnical units.

TABLE 1 – SUMMARY OF GEOTECHNICAL UNITS AND SOIL TYPES

Unit	Soil Type	Description
1	TOPSOIL	CLAY – medium to high plasticity, dark grey-brown, with some fine to medium grained sand, root affected.
2	ALLUVIUM	CLAY – high plasticity, generally dark grey to black and brown. CLAY – medium to high plasticity, brown to pale brown, trace fine to medium grained (mostly fine grained) sand. With some / trace inclusions of fine to medium grained angular to sub-angular gravel in places. Possibly Residual Soil in places.
3	RESIDUAL SOIL	Sandy CLAY, CLAY, Silty Sandy CLAY – generally medium to high plasticity, pale grey-brown to pale brown, trace pale orange-brown and grey, fine to medium grained (mostly fine grained) sand. Gravelly Sandy CLAY – medium plasticity, pale brown, fine to coarse grained (mostly fine to medium grained) sand, fine to medium grained (mostly fine grained) sub-angular gravel. With some relict rock structure, borderline Extremely Weathered Rock in places. Possibly Alluvium in places.
4	EXTREMELY WEATHERED (XW) ROCK (with soil properties)	Sandy Siltstone; breaks down into Clayey Sandy GRAVEL – fine to medium grained, angular, pale grey-brown to pale brown, trace pale orange-brown to pale yellow-brown and grey, fine to coarse grained (mostly fine grained) sand, fines of medium plasticity. Sandy Siltstone, Siltstone; breaks down into Gravelly Sandy CLAY – medium to high plasticity, pale brown to pale grey-brown, trace pale orange-brown to pale yellow-brown and grey, fine to coarse grained (mostly fine grained) sand, fine to medium grained angular gravel.
5	HIGHLY WEATHERED (HW) ROCK	Sandy SILTSTONE, Silty SANDSTONE – fine grained sand, pale grey-brown, trace grey and pale orange-brown, estimated very low to low strength. Generally includes Extremely Weathered bands / pockets.

Table 2 contains a summary of the distribution of the above geotechnical units at the borehole locations.

TABLE 2 – SUMMARY OF GEOTECHNICAL UNITS ENCOUNTERED AT EACH BOREHOLE LOCATION

Location	Unit 1 Topsoil	Unit 2 Alluvium	Unit 3 Residual Soil	Unit 4 Extremely Weathered Rock	Unit 5 Highly Weathered Rock
	Depth (m)				
BH501	0.00 - 0.30	0.30 - 1.90	1.90 - 3.00	3.00 - 3.50	-
BH502	0.00 - 0.25	0.25 - 1.40	1.40 - 2.00	2.00 - 2.40	2.40 - 3.50
BH503	0.00 - 0.30	0.30 - 1.50	1.50 - 3.00	3.00 - 3.40	3.40 - 3.50
BH504	0.00 - 0.15	0.15 - 1.50	1.50 - 1.75	-	1.75 - 3.50
BH505	0.00 - 0.20	0.20 - 2.90	2.90 - 3.50	-	-
BH506	0.00 - 0.20	0.20 - 2.30	2.30 - 3.50	-	-
BH507	0.00 - 0.30	0.30 - 2.00	2.00 - 2.40	2.40 - 3.00	3.00 - 3.50
BH508	0.00 - 0.25	0.25 - 2.00	2.00 - 3.50	-	-
BH509	0.00 - 0.20	0.20 - 1.80	1.80 - 3.20	3.20 - 3.50	-
BH510	0.00 - 0.20	0.20 - 1.50	1.50 - 3.30	3.30 - 3.50	-

No groundwater levels or inflows were encountered in the boreholes during the limited time that they remained open on the day of the field investigation.

It should be noted that groundwater conditions can vary due to rainfall and other influences including regional groundwater flow, temperature, permeability, recharge areas, surface condition, and subsoil drainage.

4.0 Laboratory Testing

Samples collected during the current field investigations were returned to our NATA accredited Newcastle Laboratory for testing which comprised of twenty (20 no.) Shrink / Swell tests.

Due to limitations on sampling depths with the U50 tubes, some soils sampled from greater depths (i.e. 1.5m and greater) were collected as disturbed samples and remoulded for Shrink / Swell testing.

Results of the laboratory testing are presented in Appendix B, with a summary of the Shrink / Swell test results presented in Table 3.

TABLE 3 – SUMMARY OF SHRINK / SWELL TESTING RESULTS

Location	Depth (m)	Material Description	I_{ss} (%)
BH501	0.50 - 0.80	(CH) CLAY	3.7
BH501	2.20 - 2.30	(CI) Sandy CLAY	3.7
BH502	0.40 - 0.65	(CH) CLAY	5.4
BH502	1.10 - 1.25	(CH) CLAY	3.9
BH503	0.40 - 0.65	(CH) CLAY	3.1
BH503	1.20 - 1.40	(CH) CLAY	2.4
BH504	0.50 - 0.80	(CH) CLAY	4.7
BH504	1.00 - 1.15	(CH) CLAY	3.2
BH505	0.40 - 0.65	(CH) CLAY	6.2
BH505	2.50 - 2.70	(CH) CLAY	4.2
BH506	0.40 - 0.65	(CH) CLAY	3.9
BH506	1.00 - 1.25	(CH) CLAY	4.1
BH507	0.40 - 0.70	(CH) CLAY	3.7
BH507	1.00 - 1.30	(CH) CLAY	3.7
BH508	1.00 - 1.25	(CH) CLAY	4.2
BH508	2.20 - 2.30	(CI) Sandy CLAY	3.6
BH509	0.40 - 0.65	(CH) CLAY	4.8
BH509	1.00 - 1.30	(CH) CLAY	4.4
BH510	0.40 - 0.65	(CH) CLAY	4.7
BH510	1.00 - 1.22	(CH) CLAY	3.5

5.0 Site Classification to AS2870-2011

Based on the results of the field work and laboratory testing carried out, residential lots within Stage 5 of the Kurrajong Estate Residential subdivision, located at Cockatoo Close, Scone, as shown in the attached Figure AA1 are classified in their current condition in accordance with AS2870-2011 'Residential Slabs and Footings', as shown in Table 5.

TABLE 5 – SITE CLASSIFICATION TO AS2870-2011

Lot Numbers	Site Classification to AS2870-2011
501 to 516	E-D

A characteristic free surface movement of greater than 75mm is estimated for the lots classified as **Class 'E-D'** in their existing condition.

Generally, the characteristic free surface movement calculated for most of the lots identified as **Class 'E-D'** (i.e. lots 501 to 507, and 509 to 516) are up to about 115mm. A characteristic free surface movement of about 130mm is estimated for lot 508 in its existing condition.

The effects of changes to the soil profile by additional cutting and filling and the effects of past and future trees should be considered in selection of the design value for differential movement.

If site re-grading works involving cutting or filling are performed after the date of this assessment the classification may change and further advice should be sought. If any site regrade works take place, final site classification will be dependent on the type of fill and level of supervision carried out. Re-classification of lots should be confirmed by the geotechnical authority at the time of construction following any site re-grade works.

Footings for the proposed development should be designed and constructed in accordance with the requirements of AS2870-2011.

The classification presented above assumes that:

- All footings are founded in controlled fill (if applicable) or in the natural clayey soils or rock below all non-controlled fill, topsoil material and root zones, and fill under slab panels meets the requirements of AS2870-2011, in particular, the root zone must be removed prior to the placement of fill materials beneath slabs;
- The performance expectations set out in Appendix B of AS2870-2011 are acceptable, and that site foundation maintenance is undertaken to avoid extremes of wetting and drying;
- Footings are to be founded outside of or below all zones of influence resulting from existing or future service trenches;
- The constructional and architectural requirements for reactive clay sites set out in AS2870-2011 are followed;
- Adherence to the detailing requirement outlined in Section 5 of AS2870-2011 '*Residential Slabs and Footings*' is essential, in particular Section 5.6, '*Additional requirements for Classes M, H1, H2 and E sites*' including architectural restrictions, plumbing and drainage requirements; and,
- Site maintenance complies with the provisions of CSIRO Sheet BTF 18, "*Foundation Maintenance and Footing Performance: A Homeowner's Guide*", a copy of which is attached in Appendix C.

All structural elements on all lots should be supported on footings founded beneath all uncontrolled fill, layers of inadequate bearing capacity, soft/loose, wet or other potentially deleterious material.

If any localised areas of uncontrolled fill of depths greater than 0.4m are encountered during construction, footings should be designed in accordance with engineering principles for Class 'P' sites.

6.0 Limitations

The findings presented in the report and used as the basis for recommendations presented herein were obtained using normal, industry accepted geotechnical design practices and standards. To our knowledge, they represent a reasonable interpretation of the general conditions of the site.


The extent of testing associated with this assessment is limited to discrete borehole locations. It should be noted that subsurface conditions between and away from the borehole and test pit locations may be different to those observed during the field work and used as the basis of the recommendations contained in this report.

If subsurface conditions encountered during construction differ from those given in this report, further advice should be sought without delay.

Data and opinions contained within the report may not be used in other contexts or for any other purposes without prior review and agreement by Qualtest. If this report is reproduced, it must be in full.

If you have any further questions regarding this report, please do not hesitate to contact Ben Bunting, Shannon Kelly, or the undersigned.

For and on behalf of Qualtest Laboratory (NSW) Pty Ltd.




Jason Lee
Principal Geotechnical Engineer

□

FIGURE AA1

Site Plan and Approximate Test Locations

□

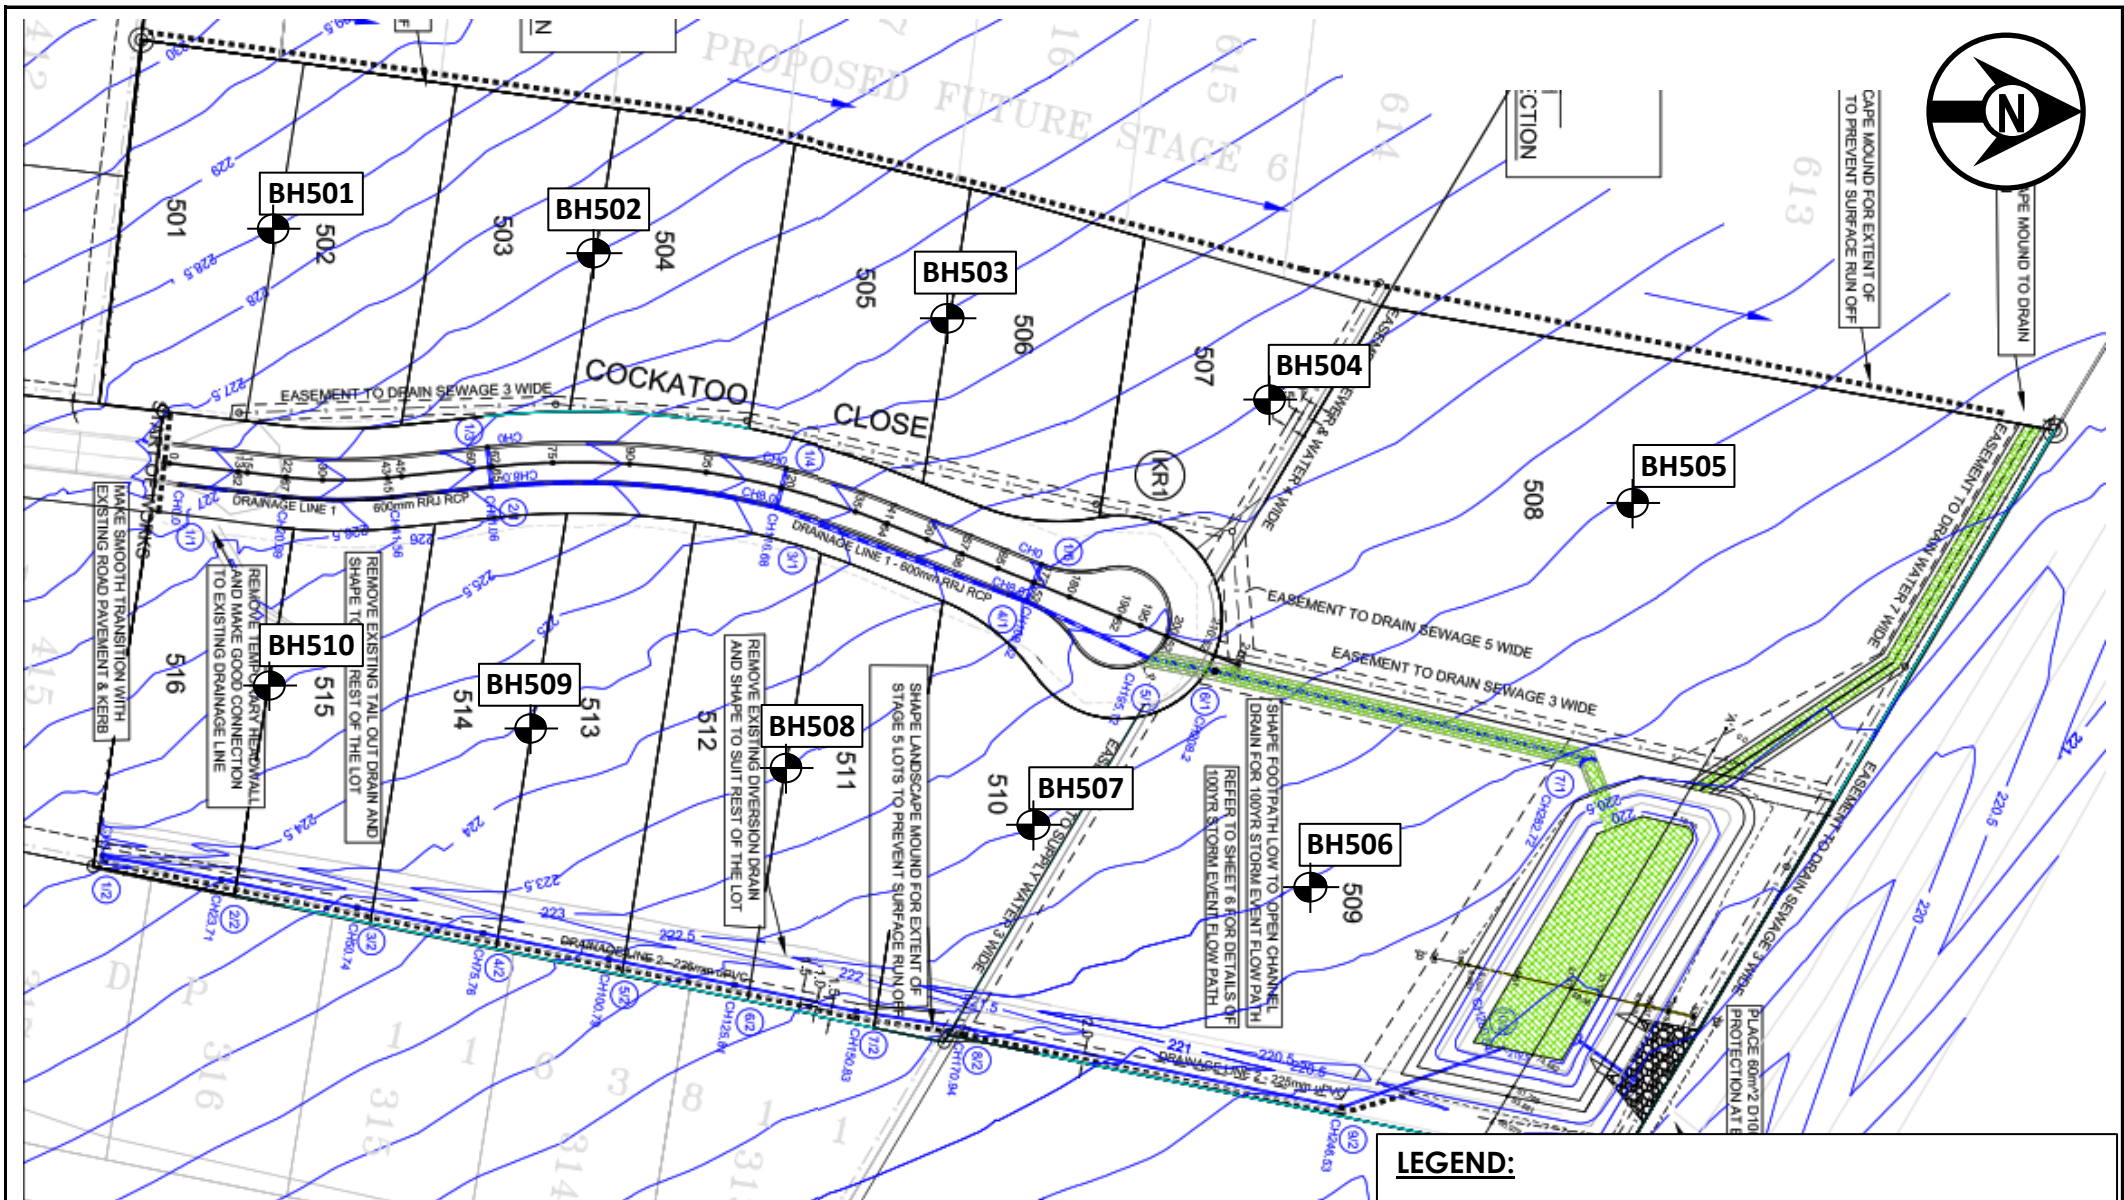

Based on site plans prepared by MM Hyndes Bailey & Co
 (Job No. 207203, Sheet Nos. 1 and 2, Rev. D, dated July 2022)

LEGEND:



Approximate borehole test location



Client:	MCCLOY PROJECT MANAGEMENT PTY LTD	Drawing No:	FIGURE AA1
Project:	KURRAJONG ESTATE - STAGE 5	Project No:	NEW23P-0038
Location:	COCKATOO CLOSE, SCONE	Scale:	N.T.S.
Title:	SITE PLAN AND APPROXIMATE TEST LOCATIONS	Date:	13/04/2023

APPENDIX A:

Results of Field Investigations



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH501**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T Not Encountered						CH	TOPSOIL: CLAY - medium to high plasticity, dark grey, brown, with some fine to medium grained sand, root affected.					TOPSOIL	
		0.50m		0.5		CH	CLAY - high plasticity, dark grey and brown.			HP	380	ALLUVIUM	
		U50 0.80m		0.80m		CH	CLAY - medium to high plasticity, brown, trace fine to medium grained sand.			HP	410		
		U50 1.10m		1.0		CH	CLAY - medium to high plasticity, brown, trace fine to medium grained sand.		H	HP	500		
		1.50m		1.5		CH	CLAY - medium to high plasticity, pale brown, with some fine to coarse grained (mostly fine to medium grained) sand.	M < W _p		HP	600	ALLUVIUM/ RESIDUAL SOIL	
		D 1.70m		1.90m		CH	Sandy CLAY - medium plasticity, pale grey brown to pale brown, trace pale orange-brown and grey, fine to medium grained sand.						RESIDUAL SOIL
		2.20m		2.0			With some relict rock structure, fine to medium grained sub-angular to angular gravel.						
		D 2.30m		2.5		CI			H / Fb				
		3.30m		3.0			Extremely Weathered Sandy Siltstone: breaks down into Clayey Sandy GRAVEL - fine to medium grained, angular, pale grey-brown to pale brown, trace pale orange-brown to pale yellow-brown and grey, fine to coarse (mostly fine grained) sand, fines of medium plasticity.	D	VD				EXTREMELY WEATHERED ROCK
		D 3.50m		3.5									
							Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:

Water

- Water Level (Date and time shown)
- Water Inflow
- Water Outflow

Strata Changes

- Gradational or transitional strata
- Definitive or distinct strata change

Notes, Samples and Tests

- U₃₀ 50mm Diameter tube sample
- CBR Bulk sample for CBR testing
- E Environmental sample (Glass jar, sealed and chilled on site)
- ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
- B Bulk Sample

Field Tests

- PID Photoionisation detector reading (ppm)
- DCP(x-y) Dynamic penetrometer test (test depth interval shown)
- HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		

Density		Density Index
V Very Loose		<15%
L Loose		15 - 35%
MD Medium Dense		35 - 65%
D Dense		65 - 85%
VD Very Dense		85 - 100%

OT.LIB.1.1.GLB.Log.NON-CORED.BOREHOLE - TEST.PIT.00-TEMPLATE.LOGS.SHEET.GPJ <-DrawingFile> 13/04/2023 12:16 10.03.00.09 Datgel Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH502**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations			
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result		
AD/T	Not Encountered	0.40m				CH	TOPSOIL: CLAY - medium to high plasticity, dark grey, brown, with some fine to medium grained sand, root affected.	M < W _p		HP	530	TOPSOIL		
		U50 0.65m		0.25m		CH	CLAY - high plasticity, dark grey to black.							
		1.10m			0.75m		CH	CLAY - medium to high plasticity, brown, trace fine grained sand.	M ~ W _p	H	HP	380		
		U50 1.35m		1.40m		CH	CLAY - medium to high plasticity, pale brown, with some pale grey to white.						H / Fb	HP
					1.70m		CH	Sandy CLAY - medium to high plasticity, pale brown, trace fine to coarse grained (mostly fine to medium grained) sand, with some fine to medium grained sub-angular gravel.	M < W _p	H			RESIDUAL SOIL	
					2.00m		CH	Extremely Weathered Sandy Siltstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale brown to pale grey-brown, trace orange-brown to pale yellow-brown and grey, fine to coarse (mostly fine grained) sand, fine to medium grained angular gravel.						H / Fb
					2.40m				D					EXTREMELY TO HIGHLY WEATHERED ROCK
					3.0									
				3.50m			Hole Terminated at 3.50 m Limit Of Reach							

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 --- Gradational or transitional strata
 ——— Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		
Density	V Very Loose	Density Index <15%
L Loose	MD Medium Dense	Density Index 15 - 35%
D Dense	VD Very Dense	Density Index 35 - 65%
		Density Index 65 - 85%
		Density Index 85 - 100%

OT.LIB.1.1.GLB.Log.NON-CORED.BOREHOLE - TEST.PIT.00-TEMPLATE.LOGS.SHEET.GPJ <<DrawingFile>> 13/04/2023 12:16 10.03.00.09 Datgel.Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH503**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL: _____
 DATUM: _____

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T Not Encountered						CH	TOPSOIL: CLAY - medium to high plasticity, dark grey, brown, with some fine to medium grained sand, root affected.	M < w _p	H	HP	490	TOPSOIL	
		0.40m				CH	CLAY - high plasticity, dark grey-brown to black.						
		U50 0.65m			0.5		CH	CLAY - medium to high plasticity, brown, trace fine grained sand.	M ~ w _p	H	HP	430	POSSIBLE ALLUVIUM / RESIDUAL SOIL
					1.0		CH	CLAY - medium to high plasticity, brown to pale brown, with some fine to medium grained sand, trace fine grained angular gravel.					
		1.20m			1.5		CH	CLAY - medium to high plasticity, brown to pale brown, with some fine to medium grained sand, trace fine grained angular gravel.	M < w _p	H / Fb	HP	530	RESIDUAL SOIL
		U50 1.40m			2.0		CH	Sandy CLAY - medium to high plasticity, pale brown, trace pale yellow-brown to pale orange-brown, fine grained sand.					
		2.30m			2.5		CH	Extremely Weathered Silty Sandstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale brown to orange-brown, fine to coarse grained (mostly fine grained) sand, fine to medium grained angular gravel.	D	H			EXTREMELY WEATHERED ROCK
		U50 2.40m			3.0		CH	Sandy SILTSTONE - fine grained, pale grey-brown to pale brown, estimated very low to low strength.					
				3.5			Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 - - - Gradational or transitional strata
 ——— Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency		UCS (kPa)	Moisture Condition	
VS	Very Soft	<25	D	Dry
S	Soft	25 - 50	M	Moist
F	Firm	50 - 100	W	Wet
St	Stiff	100 - 200	W _p	Plastic Limit
VSt	Very Stiff	200 - 400	W _L	Liquid Limit
H	Hard	>400		
Fb	Friable			
Density		V	Density Index <15%	
L	Loose		Density Index 15 - 35%	
MD	Medium Dense		Density Index 35 - 65%	
D	Dense		Density Index 65 - 85%	
VD	Very Dense		Density Index 85 - 100%	

OT.LIB.1.1.GLB.Log_NON-CORED BOREHOLE - TEST PIT.00-TEMPLATE LOGS SHEET.GPJ <-DrawingFile> 13/04/2023 12:16 10.03.00.09 Datgel Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH504**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T	Not Encountered			0.15m		CH	TOPSOIL: CLAY - medium to high plasticity, dark grey, brown, with some fine to medium grained sand, root affected.	M < W _p				TOPSOIL	
				0.45m		CH	CLAY - high plasticity, dark grey.	M ~ W _p	VSt	HP	300	ALLUVIUM	
		0.50m		0.5						HP	540		
		U50		0.80m									
		1.00m		1.0									
		U50		1.15m									
				1.50m		CH	CLAY - medium to high plasticity, brown, trace fine to medium grained (mostly fine grained) sand.	M < W _p	H	HP	500		
				1.75m		CH	Gravelly Sandy CLAY - medium plasticity, pale brown, fine to medium (mostly fine grained) sand, fine to medium grained (mostly fine grained) sub-angular gravel.		H / Fb		510	RESIDUAL SOIL / EXTREMELY WEATHERED ROCK	
				2.10m			Sandy SILTSTONE - fine grained, pale grey-brown to pale grey, estimated very low strength, with some Extremely Weathered bands.					HIGHLY WEATHERED ROCK	
		D		2.20m									
				2.5									
				3.0									
				3.5			Pale orange-brown.						
				3.50m			Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 - - - Gradational or transitional strata
 ——— Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency
 VS Very Soft
 S Soft
 F Firm
 St Stiff
 VSt Very Stiff
 H Hard
 Fb Friable

UCS (kPa)
 <25
 25 - 50
 50 - 100
 100 - 200
 200 - 400
 >400

Density
 V Very Loose
 L Loose
 MD Medium Dense
 D Dense
 VD Very Dense

Moisture Condition
 D Dry
 M Moist
 W Wet
 W_p Plastic Limit
 W_L Liquid Limit

Density Index <15%
 Density Index 15 - 35%
 Density Index 35 - 65%
 Density Index 65 - 85%
 Density Index 85 - 100%

OT.LIB.1.1.GLB.Log_NON-CORED BOREHOLE - TEST PIT 00-TEMPLATE LOGS SHEET.GPJ <<DrawingFile>> 13/04/2023 12:16 10.03.00.09 Datgel Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH505**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T	Not Encountered					CH	TOPSOIL: CLAY - medium to high plasticity, dark grey-brown, with some fine to medium grained sand, root affected.	M < W _p		HP	550	TOPSOIL	
		0.40m				CH	CLAY - high plasticity, dark grey.						
		U50			0.5								
		0.65m											
		0.90m			1.0			CLAY - medium to high plasticity, brown, with some fine grained sand.			HP	>600	
		U50			1.20m						HP	580	
		1.20m											
				1.5			Pocket of grey (up to approx. 100mm diameter nodules)		H	HP	530	ALLUVIUM / POSSIBLE RESIDUAL SOIL	
				2.0						HP	560		
				2.5									
				2.50m						HP	500		
				D									
				2.70m									
				3.0			Sandy CLAY - medium to high plasticity, pale brown, fine grained sand.			HP	510	RESIDUAL SOIL	
				3.50m									
							Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:

Water

- Water Level (Date and time shown)
- Water Inflow
- Water Outflow

Strata Changes

- Gradational or transitional strata
- Definitive or distinct strata change

Notes, Samples and Tests

- U₃₀ 50mm Diameter tube sample
- CBR Bulk sample for CBR testing
- E Environmental sample (Glass jar, sealed and chilled on site)
- ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
- B Bulk Sample

Field Tests

- PID Photoionisation detector reading (ppm)
- DCP(x-y) Dynamic penetrometer test (test depth interval shown)
- HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		
Density	V Very Loose	Density Index <15%
L Loose	MD Medium Dense	Density Index 15 - 35%
D Dense		Density Index 35 - 65%
VD Very Dense		Density Index 65 - 85%
		Density Index 85 - 100%

OT.LIB.1.1.GLB.Log.NON-CORED.BOREHOLE - TEST.PIT.00-TEMPLATE.LOGS.SHEET.GPJ <-DrawingFile> 13/04/2023 12:16 10.03.00.09 Datgel.Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH506**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information				Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY		Test Type	Result
AD/T Not Encountered		0.40m		0.40		CH	TOPSOIL: CLAY - medium to high plasticity, dark grey-brown, with some fine to medium grained sand, root affected.	M < w _p	H	HP	580	TOPSOIL
		U50 0.65m		0.65		CH	CLAY - high plasticity, dark grey.					ALLUVIUM
		1.00m		1.00		CH	CLAY - medium to high plasticity, brown, with some fine grained sand.	H	HP	500	580	RESIDUAL SOIL / ALLUVIUM
		U50 1.25m		1.25		CH	Trace fine grained angular to sub-angular gravel. With some fine to medium grained sub-angular gravel.					
		2.80m		2.80		CH	CLAY - medium to high plasticity, brown with some pale brown to white and grey, with some fine grained sand, with some fine to medium grained sub-angular gravel.	M ~ w _p	HP	530	500	
		D 3.00m		3.00		CH	With some medium grained pale grey to white rounded gravel.					HP
				3.50					Hole Terminated at 3.50 m Limit Of Reach			

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 --- Gradational or transitional strata
 — Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		
Density	V Very Loose	Density Index <15%
L Loose	MD Medium Dense	Density Index 15 - 35%
D Dense	D Dense	Density Index 35 - 65%
VD Very Dense	D Dense	Density Index 65 - 85%
		Density Index 85 - 100%



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH507**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T	Not Encountered					CH	TOPSOIL: CLAY - medium to high plasticity, dark grey, brown, with some fine to medium grained sand.	M < W _p	H	HP	580	TOPSOIL	
		0.40m				CH	CLAY - high plasticity, dark grey.						
		U50			0.5		CH		M < W _p	H	HP		
		0.70m					CH	CLAY - medium to high plasticity, brown, with some fine grained sand.					
		1.00m			1.0		CH		M < W _p	H	HP		
		U50					CH	CLAY - medium to high plasticity, brown to pale brown, with some dark grey, with some fine grained sand.					
		1.30m			1.5		CH	With some pale brown to white.	M < W _p	H	HP		
							CH	Sandy CLAY - medium to high plasticity, pale grey to brown, fine to medium grained sand.					
			2.0		CH	With some fine angular gravel.	M < W _p	H	HP				
					CH	Extremely Weathered Sandy Siltstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale grey-brown with some pale orange and grey, fine to coarse grained (mostly fine grained) sand, fine to medium grained angular gravel.							510
			2.40m		CH		D						
					CH	Sandy SILTSTONE - fine grained, pale grey-brown and trace pale orange and grey, estimated low strength.							
			3.0										HIGHLY WEATHERED ROCK
			3.50m				Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 --- Gradational or transitional strata
 — Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		
Density	V Very Loose	Density Index <15%
L Loose	MD Medium Dense	Density Index 15 - 35%
D Dense	D Very Dense	Density Index 35 - 65%
VD Very Dense		Density Index 65 - 85%
		Density Index 85 - 100%



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH508**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL: _____
 DATUM: _____

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T Not Encountered						CH	TOPSOIL: CLAY - medium to high plasticity, dark grey to brown, with some fine to medium grained sand.	M < W _p	H	HP	>600	TOPSOIL	
		U50		0.40m		CH	CLAY - high plasticity, dark grey.						
					0.65m		CH	CLAY - medium to high plasticity, brown, with some fine grained sand.	M ~ W _p	H	HP	510	ALLUVIUM / RESIDUAL SOIL
		U50		1.00m		CH							
					1.50m		CH	Gravelly CLAY - medium to high plasticity, brown to pale brown, fine to coarse grained angular gravel.	M ~ W _p	H	HP	>600	RESIDUAL SOIL
		D		2.00m		CH	Sandy CLAY - medium plasticity, pale grey to brown, fine to medium grained sand, with some fine to medium grained (mostly fine grained) angular gravel.						
					2.20m		CI	Sandy CLAY - medium plasticity, pale orange-brown to orange-brown, fine grained sand.	M < W _p	H	HP	550	RESIDUAL SOIL
		D		2.30m		CI							
				3.50m			Hole Terminated at 3.50 m Limit Of Reach						

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 --- Gradational or transitional strata
 ——— Definitive or distinct strata change

Notes, Samples and Tests
 U₅₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency	UCS (kPa)	Moisture Condition
VS Very Soft	<25	D Dry
S Soft	25 - 50	M Moist
F Firm	50 - 100	W Wet
St Stiff	100 - 200	W _p Plastic Limit
VSt Very Stiff	200 - 400	W _L Liquid Limit
H Hard	>400	
Fb Friable		
Density	V Very Loose	Density Index <15%
L Loose	MD Medium Dense	Density Index 15 - 35%
D Dense	VD Very Dense	Density Index 35 - 65%
		Density Index 65 - 85%
		Density Index 85 - 100%

OT.LIB.1.1.GLB.Log.NON-CORED.BOREHOLE - TEST.PIT.00-TEMPLATE.LOGS.SHEET.GPJ <-DrawingFile> 13/04/2023 12:16 10.03.00.09 Datagel.Lab and In Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH509**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL:
 DATUM:

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations		
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result	
AD/T	Not Encountered			0.40m		CH	TOPSOIL: CLAY - medium to high plasticity, dark grey to brown, fine to medium grained sand, root affected.	M < w _p	H	HP	>600	TOPSOIL	
			0.20m	CH		CLAY - high plasticity, dark grey.	ALLUVIUM						
			U50	0.65m		0.5	CH	CLAY - medium to high plasticity, brown, with some fine grained sand.	M ~ w _p	H	HP	520	
			1.00m	1.0		CH	Layer of Silty SANDSTONE (approx 100mm thick), possible floater.						
			U50	1.30m		1.5	CH	Sandy CLAY - medium to high plasticity, pale brown to pale grey, fine to coarse grained (mostly fine to medium grained) sand, trace fine to medium grained sub-angular gravel.	M < w _p	H / Fb	HP	510	RESIDUAL SOIL
						2.0	CH	Pale brown.					
				3.20m	CH	Extremely Weathered Sandy Siltstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale grey-brown, fine to coarse grained (mostly fine grained) sand, fine to medium grained sub-angular to angular gravel.	H				EXTREMELY WEATHERED ROCK		
				3.40m	CH	Extremely Weathered Silty Sandstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale orange-brown with some pale grey-brown, fine grained sand, fine to medium grained angular gravel.							
				3.50m	CH	Hole Terminated at 3.50 m Limit Of Reach							

LEGEND:

Water

- Water Level (Date and time shown)
- Water Inflow
- Water Outflow

Strata Changes

- Gradational or transitional strata
- Definitive or distinct strata change

Notes, Samples and Tests

- U₃₀ 50mm Diameter tube sample
- CBR Bulk sample for CBR testing
- E Environmental sample (Glass jar, sealed and chilled on site)
- ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
- B Bulk Sample

Field Tests

- PID Photoionisation detector reading (ppm)
- DCP(x-y) Dynamic penetrometer test (test depth interval shown)
- HP Hand Penetrometer test (UCS kPa)

Consistency		UCS (kPa)	Moisture Condition	
VS	Very Soft	<25	D	Dry
S	Soft	25 - 50	M	Moist
F	Firm	50 - 100	W	Wet
St	Stiff	100 - 200	W _p	Plastic Limit
VSt	Very Stiff	200 - 400	W _L	Liquid Limit
H	Hard	>400		
Fb	Friable			

Density		Density Index	
V	Very Loose	<15%	Density Index <15%
L	Loose	15 - 35%	Density Index 15 - 35%
MD	Medium Dense	35 - 65%	Density Index 35 - 65%
D	Dense	65 - 85%	Density Index 65 - 85%
VD	Very Dense	85 - 100%	Density Index 85 - 100%

OT.LIB.1.1.GLB Log_NON-CORED BOREHOLE - TEST PIT 00-TEMPLATE LOGS SHEET.GPJ <<DrawingFile>> 13/04/2023 12:16 10.03.00.09 Datgel Lab and in Situ Tool



ENGINEERING LOG - BOREHOLE

CLIENT: MCCLOY GROUP
 PROJECT: KURRAJONG ESTATE - STAGE 5
 LOCATION: COCKATOO CLOSE, SCONE

BOREHOLE NO: **BH510**
 PAGE: 1 OF 1
 JOB NO: NEW23P-0038
 LOGGED BY: BB
 DATE: 13/3/23

DRILL TYPE: 2.7 TONNE EXCAVATOR WITH AUGER
 BOREHOLE DIAMETER: 300 mm

SURFACE RL: _____
 DATUM: _____

Drilling and Sampling				Material description and profile information					Field Test		Structure and additional observations			
METHOD	WATER	SAMPLES	RL (m)	DEPTH (m)	GRAPHIC LOG	CLASSIFICATION SYMBOL	MATERIAL DESCRIPTION: Soil type, plasticity/particle characteristics, colour, minor components	MOISTURE CONDITION	CONSISTENCY DENSITY	Test Type		Result		
AD/T	Not Encountered			0.40m		CH	TOPSOIL: CLAY - medium to high plasticity, dark grey to brown, with some fine to medium grained sand, root affected.	M < W _p	H	HP	>600	TOPSOIL		
		U50	0.65m	CH		CLAY - high plasticity, dark grey.	ALLUVIUM							
			1.00m	CH		CLAY - medium to high plasticity, brown, with some fine grained sand.	HP					530		
		U50	1.22m	CH			HP					520		
			1.80m	CH		CLAY - medium to high plasticity, pale brown, trace pale grey to white, with some fine to coarse grained sand.	M ~ W _p					HP	500	RESIDUAL SOIL / POSSIBLE ALLUVIUM
		D	2.00m	CH		Sandy CLAY - medium to high plasticity, pale grey-brown, fine to coarse grained sand.	M < W _p					HP	480	RESIDUAL SOIL
				CH		Pocket/Layer of Sandy CLAY (approx 150mm thick), possibly Extremely Weathered rock.								
				3.0	CH	Silty Sandy CLAY - medium to high plasticity, pale brown to pale yellow-brown and grey-brown, fine grained sand.	M ~ W _p	HP	450					
				3.30m	CH	Extremely Weathered Sandy Siltstone: breaks down into Gravelly Sandy CLAY - medium to high plasticity, pale grey-brown, fine to coarse grained (mostly fine grained) sand, fine to medium grained angular gravel.						EXTREMELY WEATHERED ROCK		
				3.50m	CH	Hole Terminated at 3.50 m Limit Of Reach								

LEGEND:
Water
 Water Level (Date and time shown)
 Water Inflow
 Water Outflow
Strata Changes
 - - - Gradational or transitional strata
 ——— Definitive or distinct strata change

Notes, Samples and Tests
 U₃₀ 50mm Diameter tube sample
 CBR Bulk sample for CBR testing
 E Environmental sample (Glass jar, sealed and chilled on site)
 ASS Acid Sulfate Soil Sample (Plastic bag, air expelled, chilled)
 B Bulk Sample
Field Tests
 PID Photoionisation detector reading (ppm)
 DCP(x-y) Dynamic penetrometer test (test depth interval shown)
 HP Hand Penetrometer test (UCS kPa)

Consistency		UCS (kPa)	Moisture Condition
VS	Very Soft	<25	D Dry
S	Soft	25 - 50	M Moist
F	Firm	50 - 100	W Wet
St	Stiff	100 - 200	W _p Plastic Limit
VSt	Very Stiff	200 - 400	W _L Liquid Limit
H	Hard	>400	
Fb	Friable		
Density			
V	Very Loose		Density Index <15%
L	Loose		Density Index 15 - 35%
MD	Medium Dense		Density Index 35 - 65%
D	Dense		Density Index 65 - 85%
VD	Very Dense		Density Index 85 - 100%

APPENDIX B:

Results of Laboratory Testing

Report No: SSI:NEW23W-1272-S01

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S01

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH501 - (0.50 - 0.80m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	1.8	Shrink on drying (%):	5.8
Moisture Content before (%):	31.4	Shrinkage Moisture Content (%):	32.8
Moisture Content after (%):	36.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	490	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	440	Cracking during shrinkage:	Major

Shrink Swell

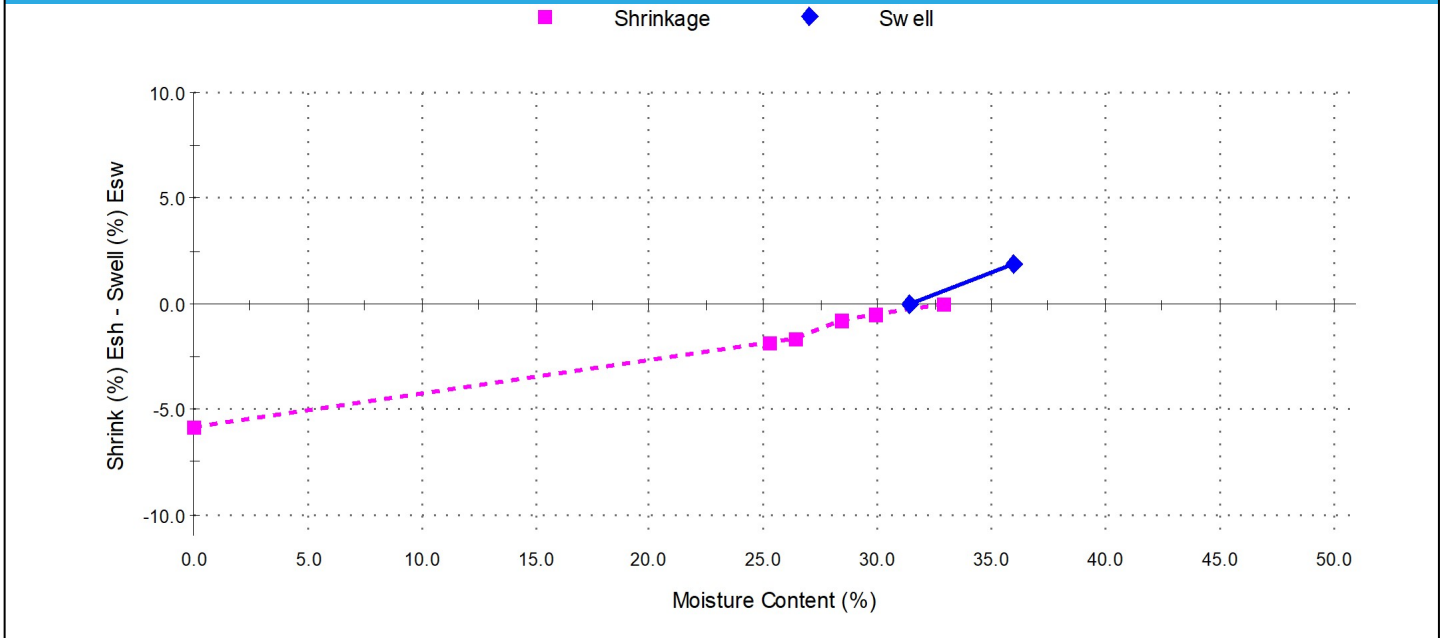

Shrink Swell Index - Iss (%): 3.7

Comments

Report No: SSI:NEW23W-1272-S02

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S02

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH502 - (0.40 - 0.65m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	4.6	Shrink on drying (%):	7.5
Moisture Content before (%):	29.5	Shrinkage Moisture Content (%):	30.4
Moisture Content after (%):	38.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	390	Cracking during shrinkage:	Major

Shrink Swell

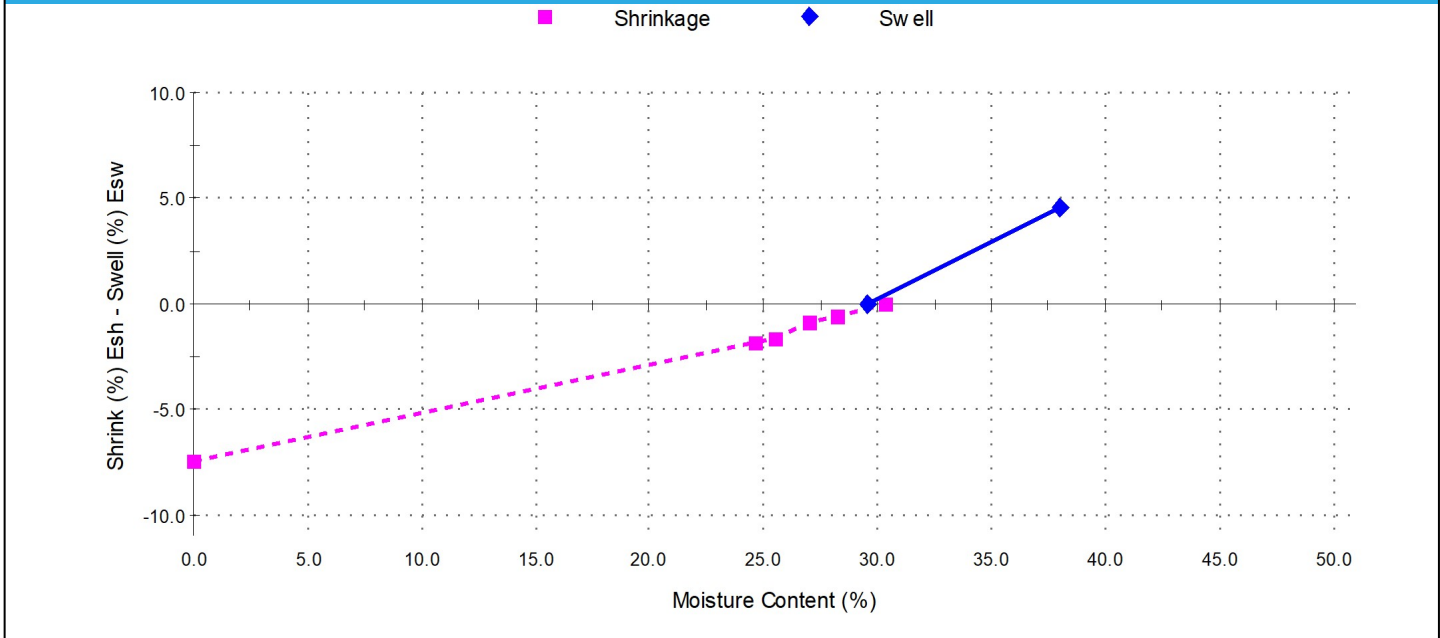

Shrink Swell Index - Iss (%): 5.4

Comments

Report No: SSI:NEW23W-1272-S03

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S03

Sampling Method: The results outlined below apply to the sample as received

Material: Clay

Source: On-Site Insitu

Specification: No Specification

Sample Location: BH502 - (1.10 - 1.35m)

Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1

Swell on Saturation (%): 4.9

Moisture Content before (%): 28.9

Moisture Content after (%): 35.0

Est. Unc. Comp. Strength before (kPa): >600

Est. Unc. Comp. Strength after (kPa): 410

Shrink Test AS 1289.7.1.1

Shrink on drying (%): 4.6


Shrinkage Moisture Content (%): 26.0

Est. inert material (%): 1%

Crumbling during shrinkage: Nil

Cracking during shrinkage: Major

Shrink Swell

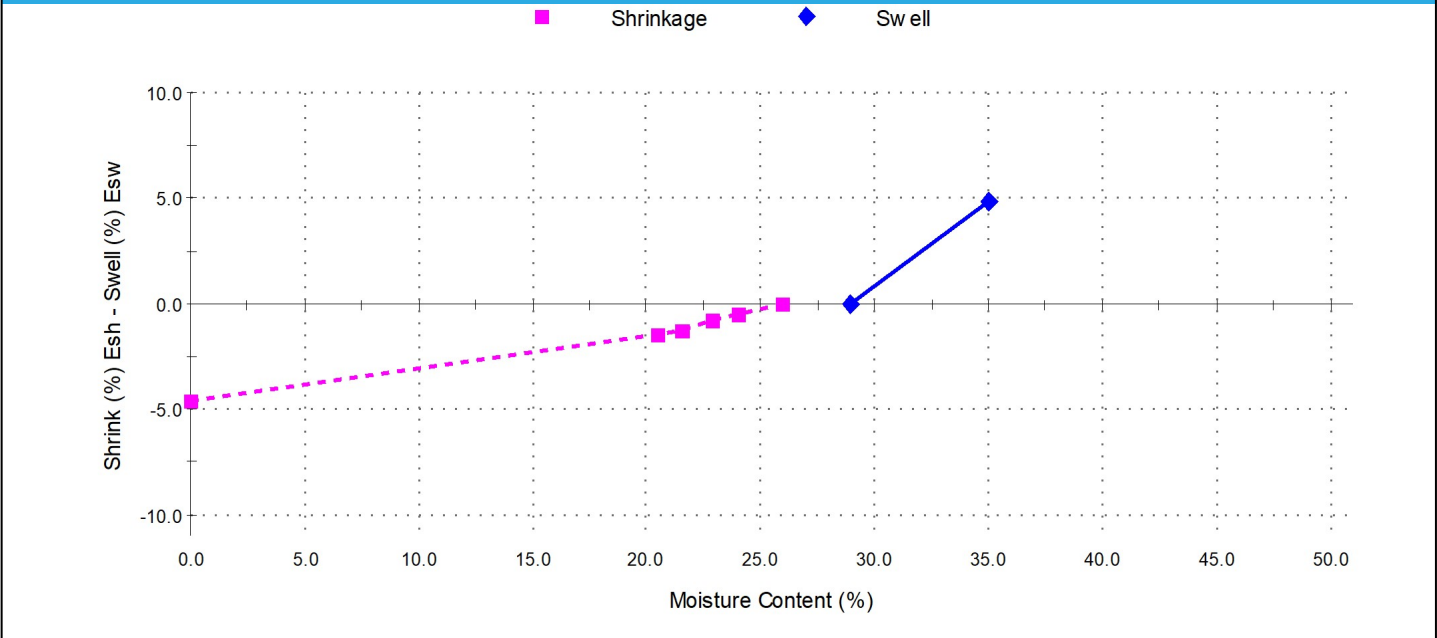

Shrink Swell Index - Iss (%): 3.9

Comments


Report No: SSI:NEW23W-1272-S04

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023


Sample Details

Sample ID: NEW23W-1272-S04
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Source: On-Site Insitu
Specification: No Specification
Sample Location: BH503 - (0.40 - 0.65m)
Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	0.0	Shrink on drying (%):	5.5
Moisture Content before (%):	32.8	Shrinkage Moisture Content (%):	26.9
Moisture Content after (%):	36.9	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	540	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	350	Cracking during shrinkage:	Moderate

Shrink Swell

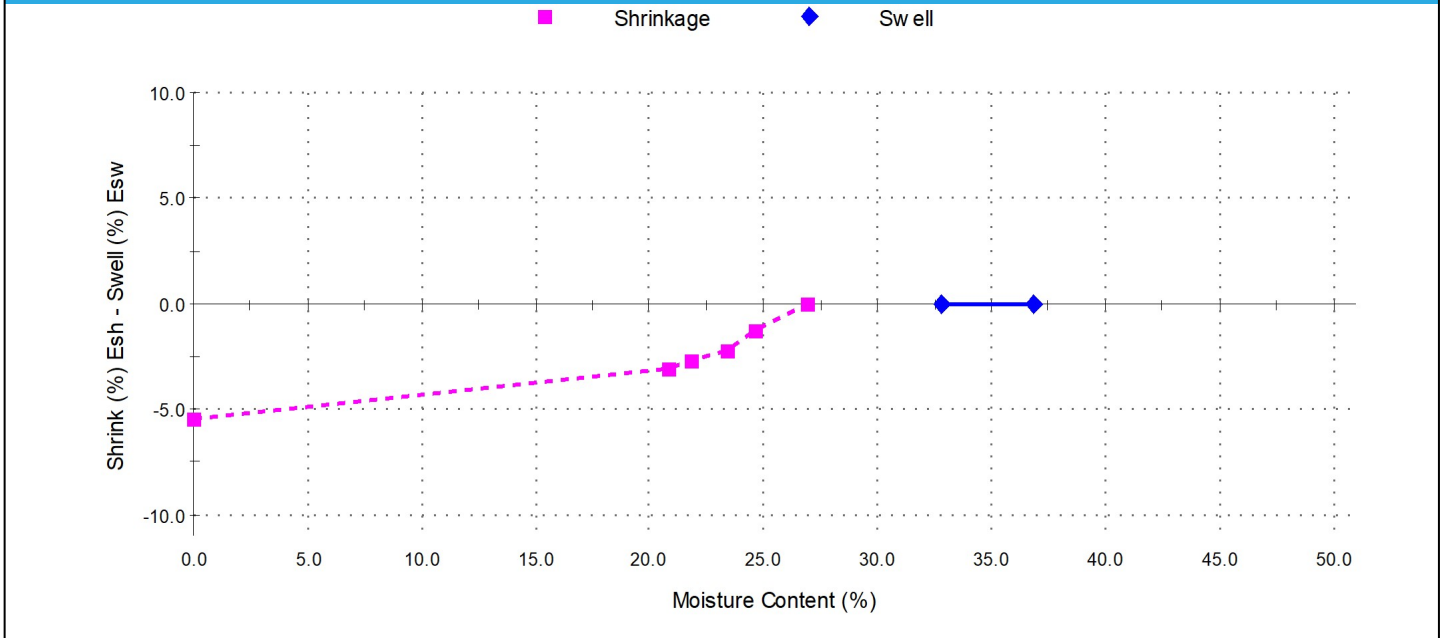

Shrink Swell Index - Iss (%): 3.1

Comments

Report No: SSI:NEW23W-1272-S05

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S05

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH503 - (1.20 - 1.40m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	-1.8	Shrink on drying (%):	4.3
Moisture Content before (%):	26.5	Shrinkage Moisture Content (%):	26.9
Moisture Content after (%):	36.2	Est. inert material (%):	2%
Est. Unc. Comp. Strength before (kPa):	550	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	230	Cracking during shrinkage:	Major

Shrink Swell

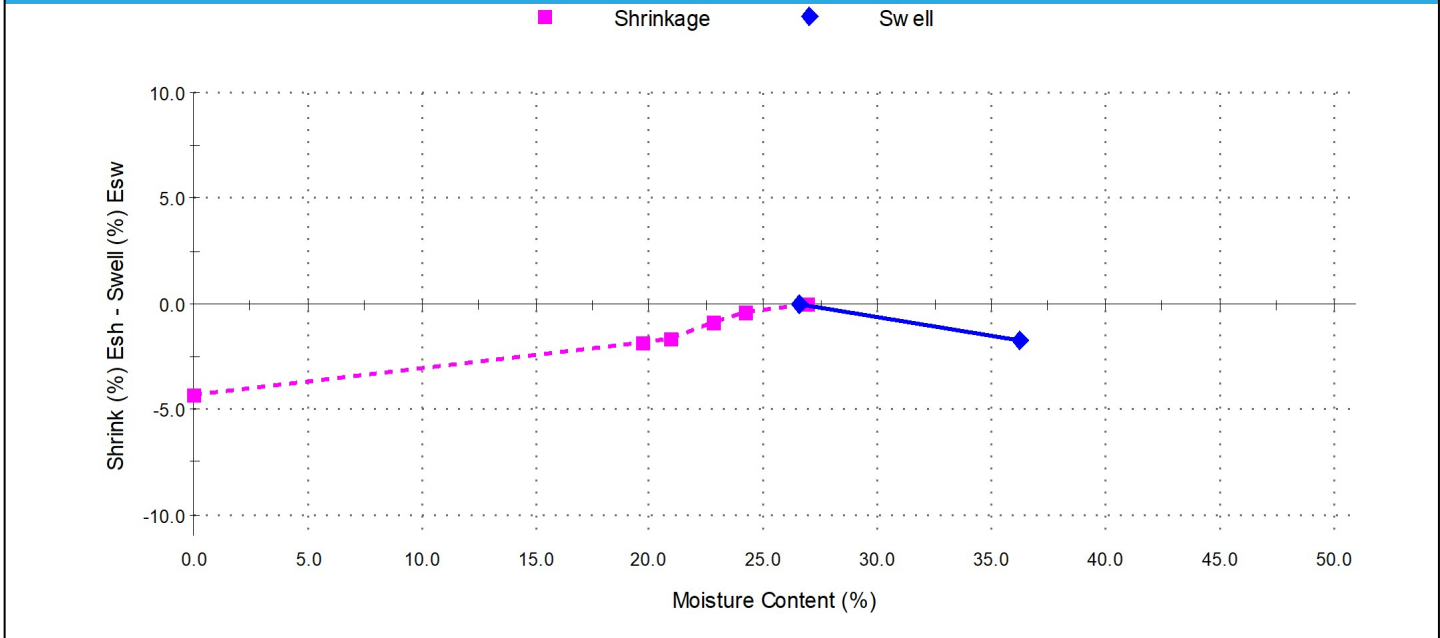

Shrink Swell Index - Iss (%): 2.4

Comments


Report No: SSI:NEW23W-1272-S06

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023


Sample Details

Sample ID: NEW23W-1272-S06
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Source: On-Site Insitu
Specification: No Specification
Sample Location: BH504 - (0.50 - 0.80m)
Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	2.6	Shrink on drying (%):	7.2
Moisture Content before (%):	30.9	Shrinkage Moisture Content (%):	33.5
Moisture Content after (%):	33.3	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	450	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	410	Cracking during shrinkage:	Major

Shrink Swell

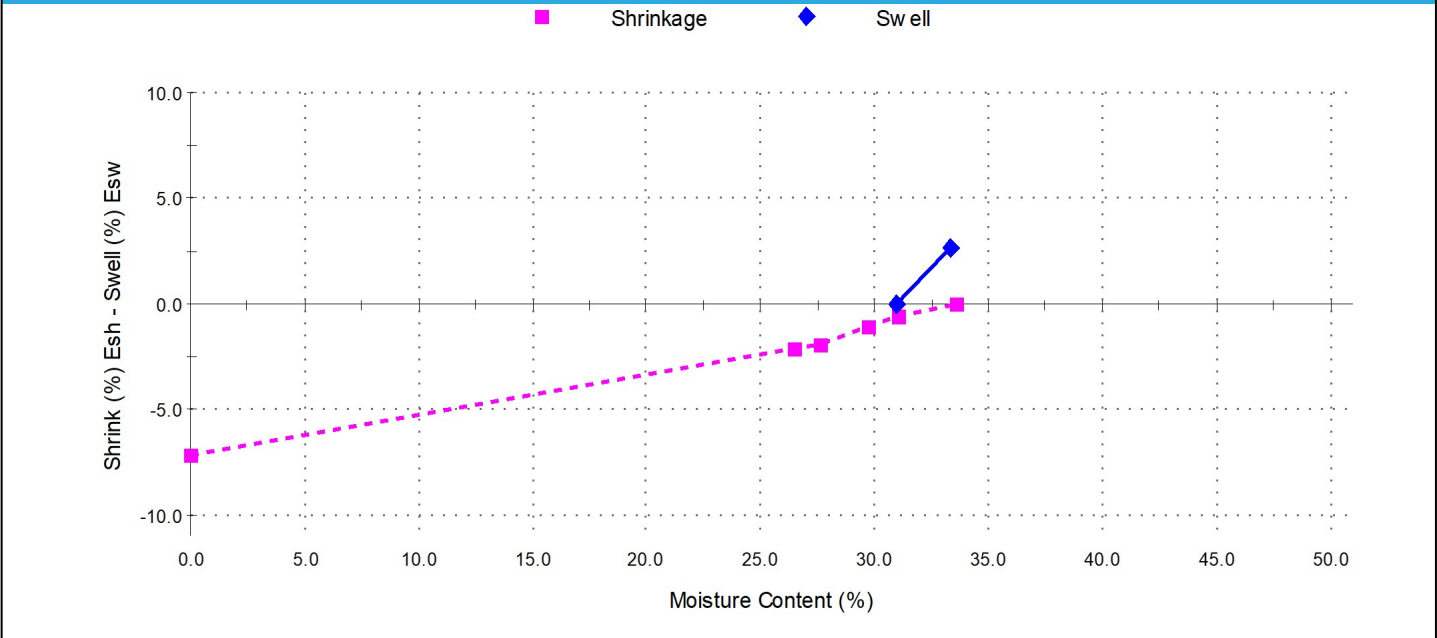

Shrink Swell Index - Iss (%): 4.7

Comments

Report No: SSI:NEW23W-1272-S07

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen

Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S07

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH504 - (1.00 - 1.15m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	2.8	Shrink on drying (%):	4.3
Moisture Content before (%):	27.7	Shrinkage Moisture Content (%):	27.3
Moisture Content after (%):	31.2	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	320	Cracking during shrinkage:	Major

Shrink Swell

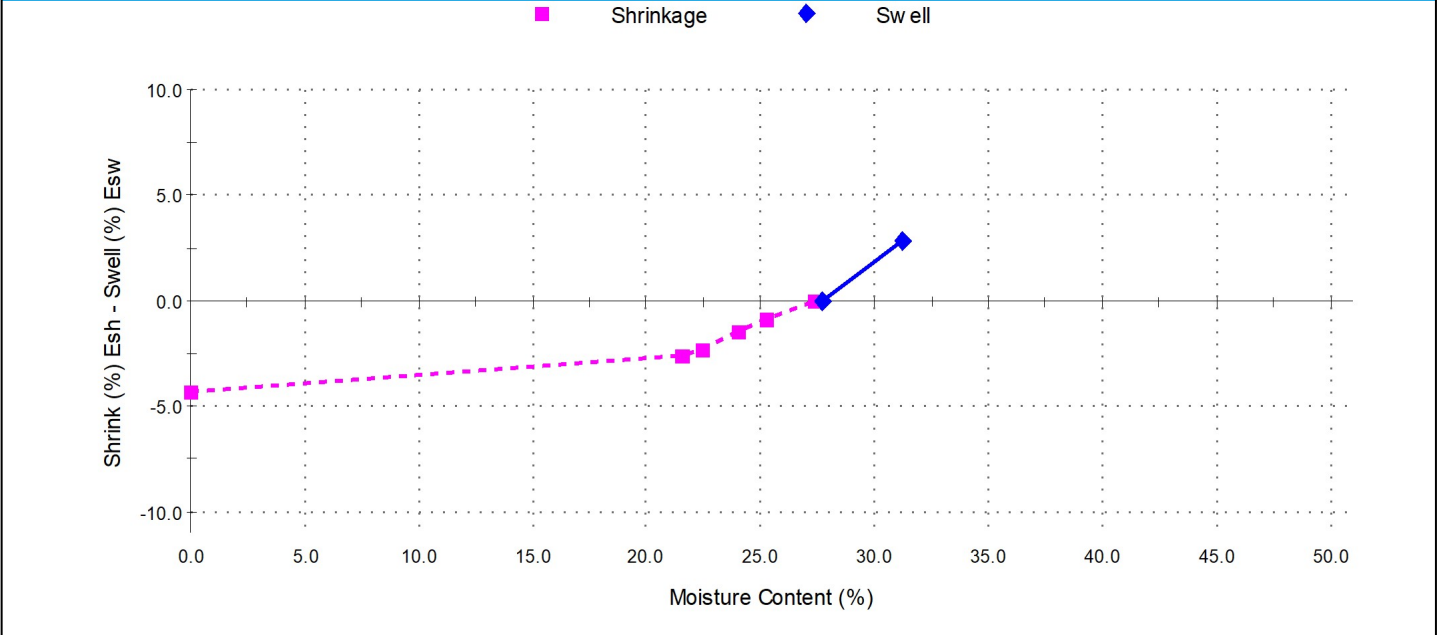

Shrink Swell Index - Iss (%): 3.2

Comments


Report No: SSI:NEW23W-1272-S08

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023


Sample Details

Sample ID: NEW23W-1272-S08
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Source: On-Site Insitu
Specification: No Specification
Sample Location: BH505 - (0.40 - 0.65m)
Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	10.4	Shrink on drying (%):	6.0
Moisture Content before (%):	25.4	Shrinkage Moisture Content (%):	26.4
Moisture Content after (%):	36.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	400	Cracking during shrinkage:	Moderate

Shrink Swell

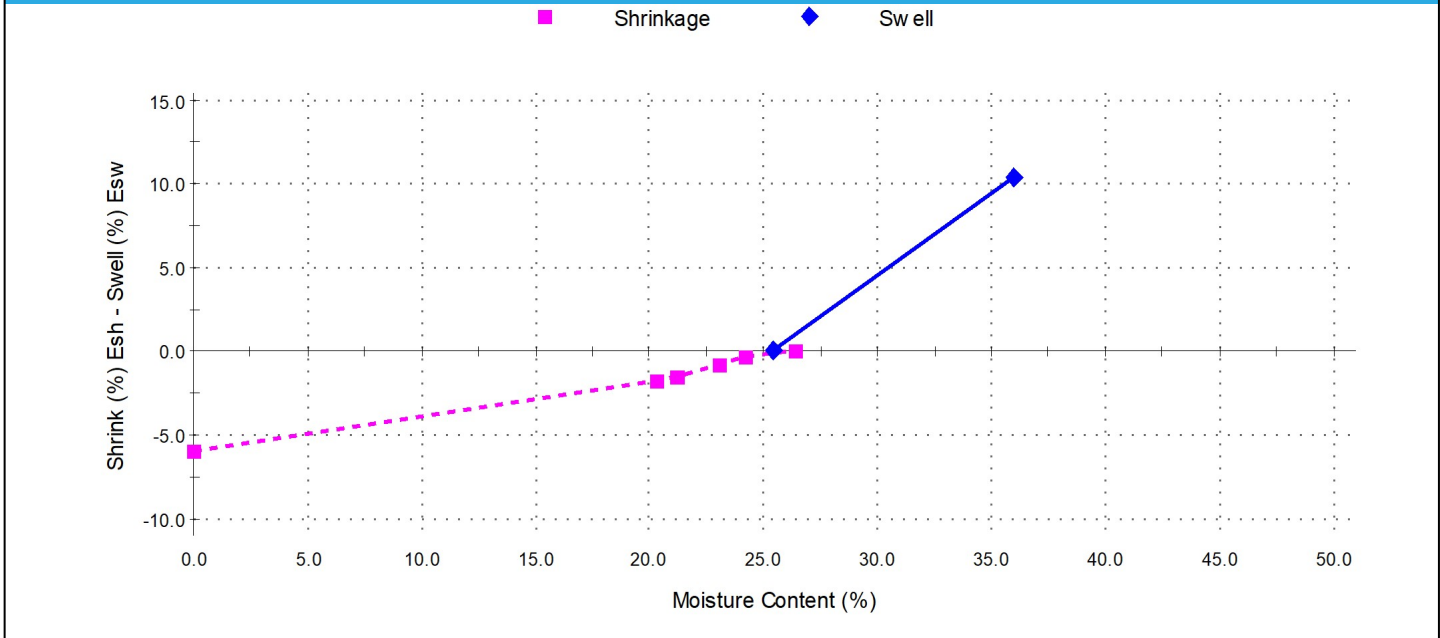

Shrink Swell Index - Iss (%): 6.2

Comments

Report No: SSI:NEW23W-1272-S09

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S09

Sampling Method: The results outlined below apply to the sample as received

Material: Clay

Source: On-Site Insitu

Specification: No Specification

Sample Location: BH506 - (0.40 - 0.65m)

Date Tested: 15/03/2023


Date Sampled: 13/03/2023

Date Submitted: 14/03/2023

Swell Test		AS 1289.7.1.1
Swell on Saturation (%):	4.5	
Moisture Content before (%):	27.7	
Moisture Content after (%):	33.9	
Est. Unc. Comp. Strength before (kPa):	>600	
Est. Unc. Comp. Strength after (kPa):	390	

Shrink Test		AS 1289.7.1.1
Shrink on drying (%):	4.8	
Shrinkage Moisture Content (%):	24.7	
Est. inert material (%):	1%	
Crumbling during shrinkage:	Nil	
Cracking during shrinkage:	Moderate	

Shrink Swell

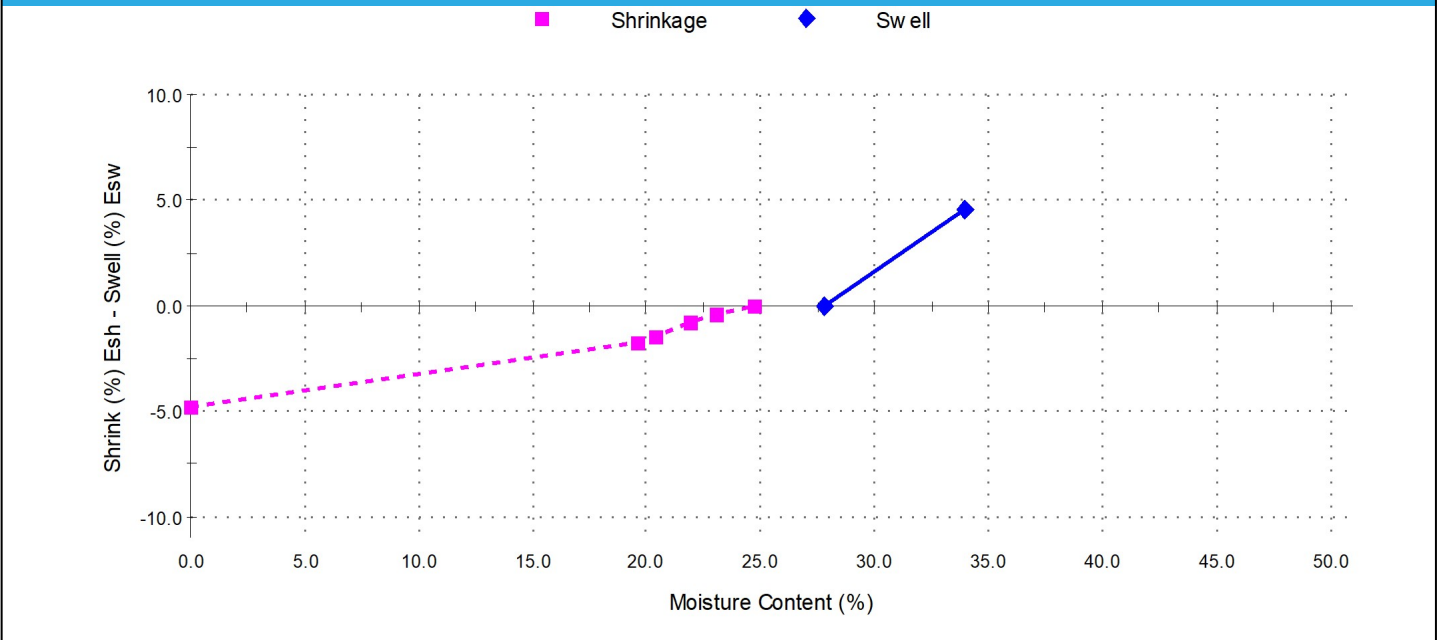

Shrink Swell Index - Iss (%): 3.9

Comments

Report No: SSI:NEW23W-1272-S10

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S10

Sampling Method: The results outlined below apply to the sample as received

Material: Clay

Source: On-Site Insitu

Specification: No Specification

Sample Location: BH506 - (1.00 - 1.25m)


Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test		AS 1289.7.1.1
Swell on Saturation (%):	3.5	
Moisture Content before (%):	26.8	
Moisture Content after (%):	31.5	
Est. Unc. Comp. Strength before (kPa):	>600	
Est. Unc. Comp. Strength after (kPa):	340	

Shrink Test		AS 1289.7.1.1
Shrink on drying (%):	5.6	
Shrinkage Moisture Content (%):	26.9	
Est. inert material (%):	1%	
Crumbling during shrinkage:	Nil	
Cracking during shrinkage:	Major	

Shrink Swell

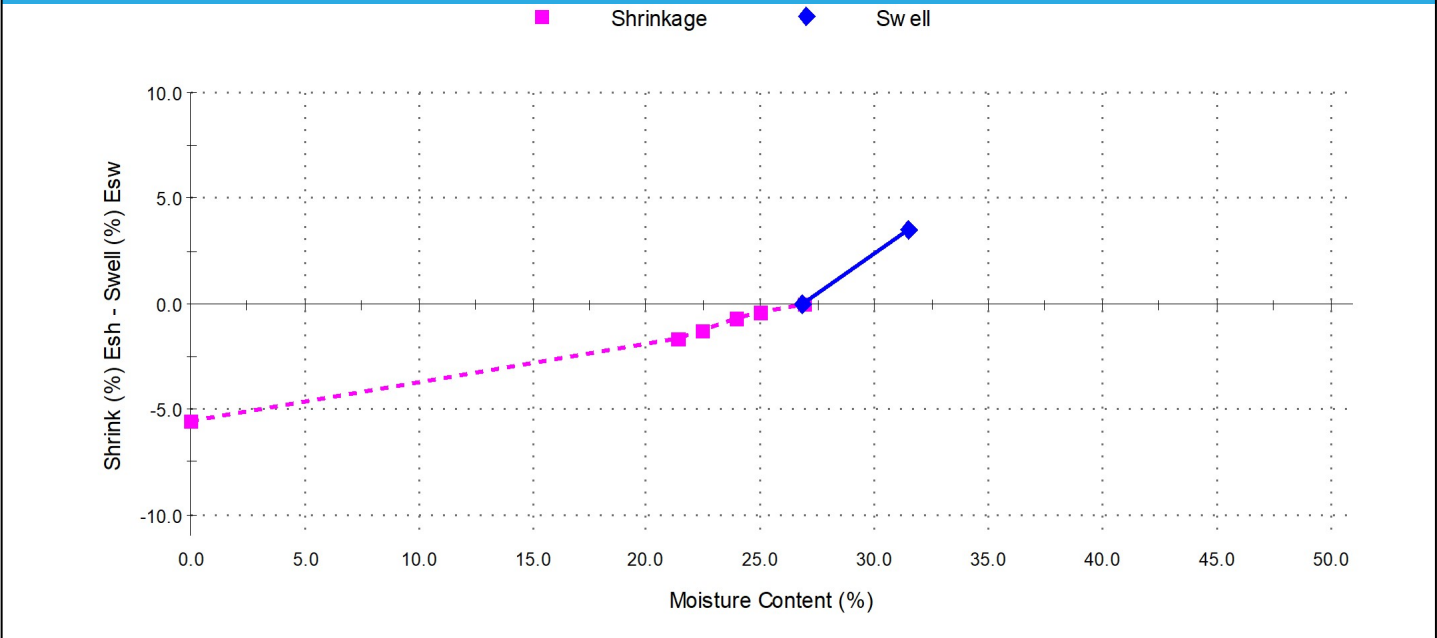

Shrink Swell Index - Iss (%): 4.1

Comments

Report No: SSI:NEW23W-1272-S11

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S11

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH507 - (0.40 - 0.70m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	2.3	Shrink on drying (%):	5.6
Moisture Content before (%):	30.1	Shrinkage Moisture Content (%):	25.8
Moisture Content after (%):	38.5	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	290	Cracking during shrinkage:	Moderate

Shrink Swell

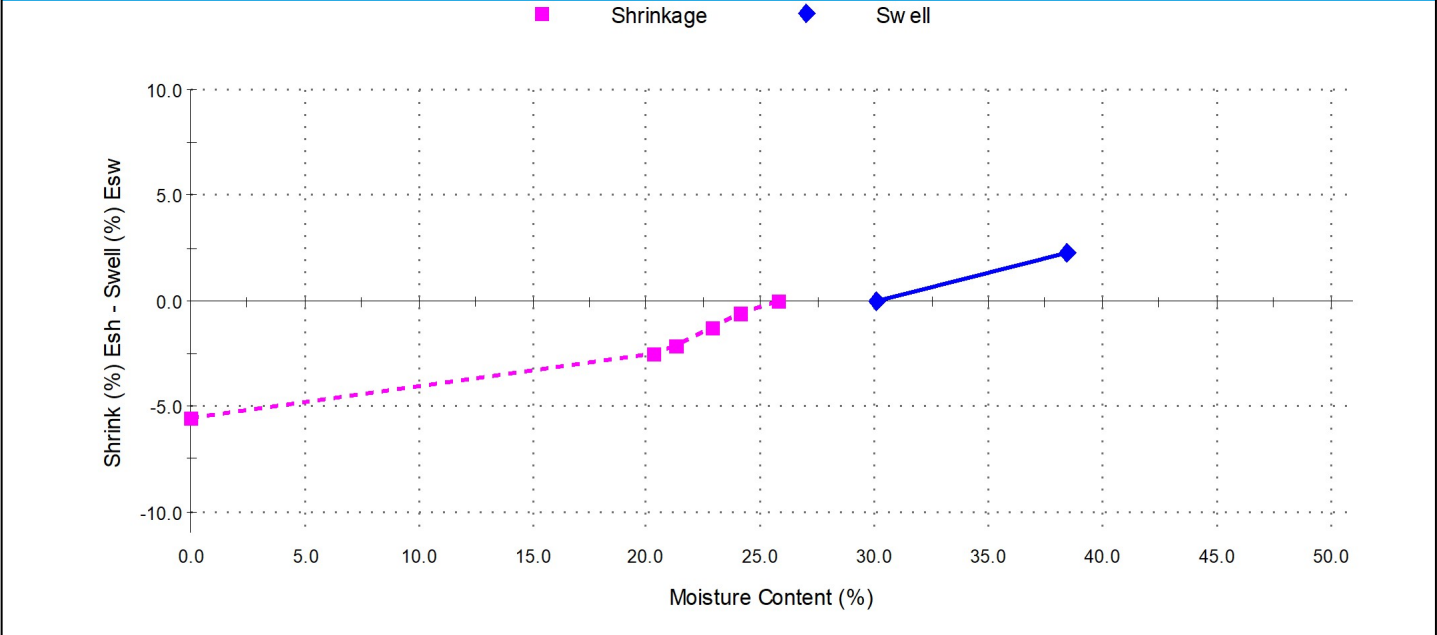

Shrink Swell Index - Iss (%): 3.7

Comments

Report No: SSI:NEW23W-1272-S12

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S12

Sampling Method: The results outlined below apply to the sample as received

Material: Clay

Source: On-Site Insitu

Specification: No Specification


Sample Location: BH507 - (1.00 - 1.30m)

Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	0.2	Shrink on drying (%):	6.6
Moisture Content before (%):	28.4	Shrinkage Moisture Content (%):	27.8
Moisture Content after (%):	36.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	540	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	300	Cracking during shrinkage:	Moderate

Shrink Swell

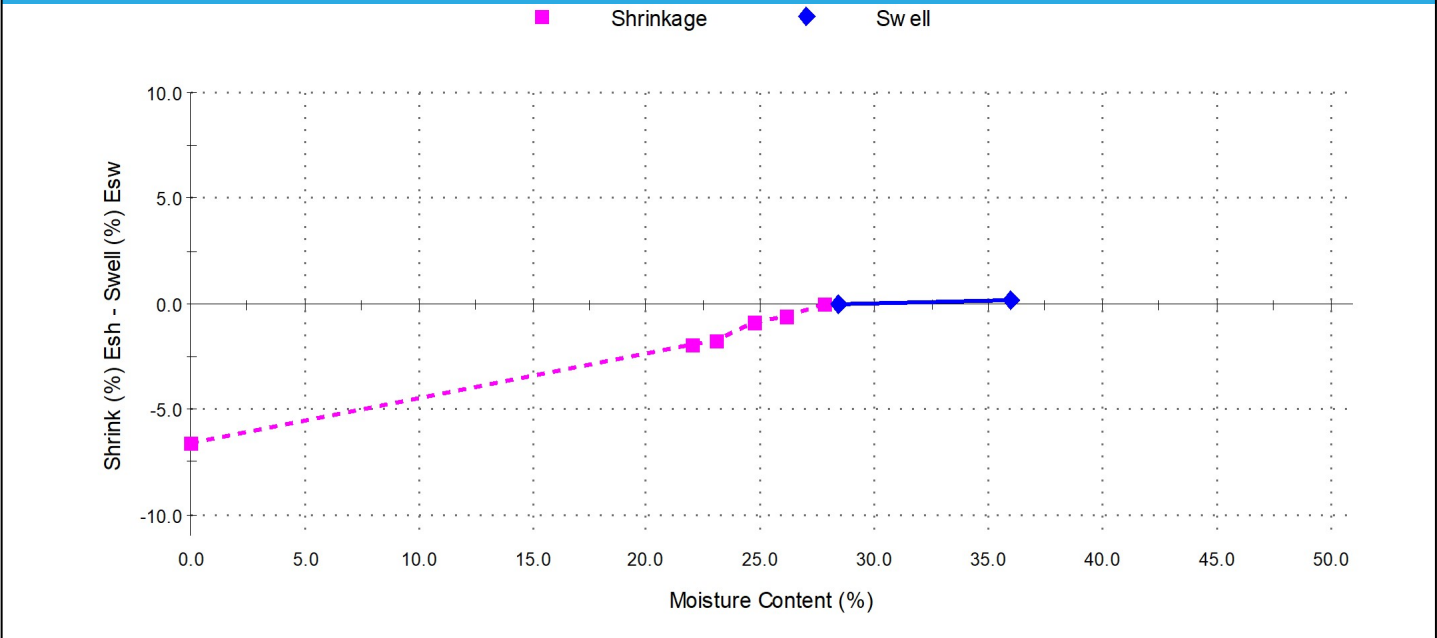

Shrink Swell Index - Iss (%): 3.7

Comments

Report No: SSI:NEW23W-1272-S13

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S13

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH508 - (1.00 - 1.25m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	4.2	Shrink on drying (%):	5.5
Moisture Content before (%):	29.7	Shrinkage Moisture Content (%):	28.8
Moisture Content after (%):	33.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	570	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	340	Cracking during shrinkage:	Major

Shrink Swell

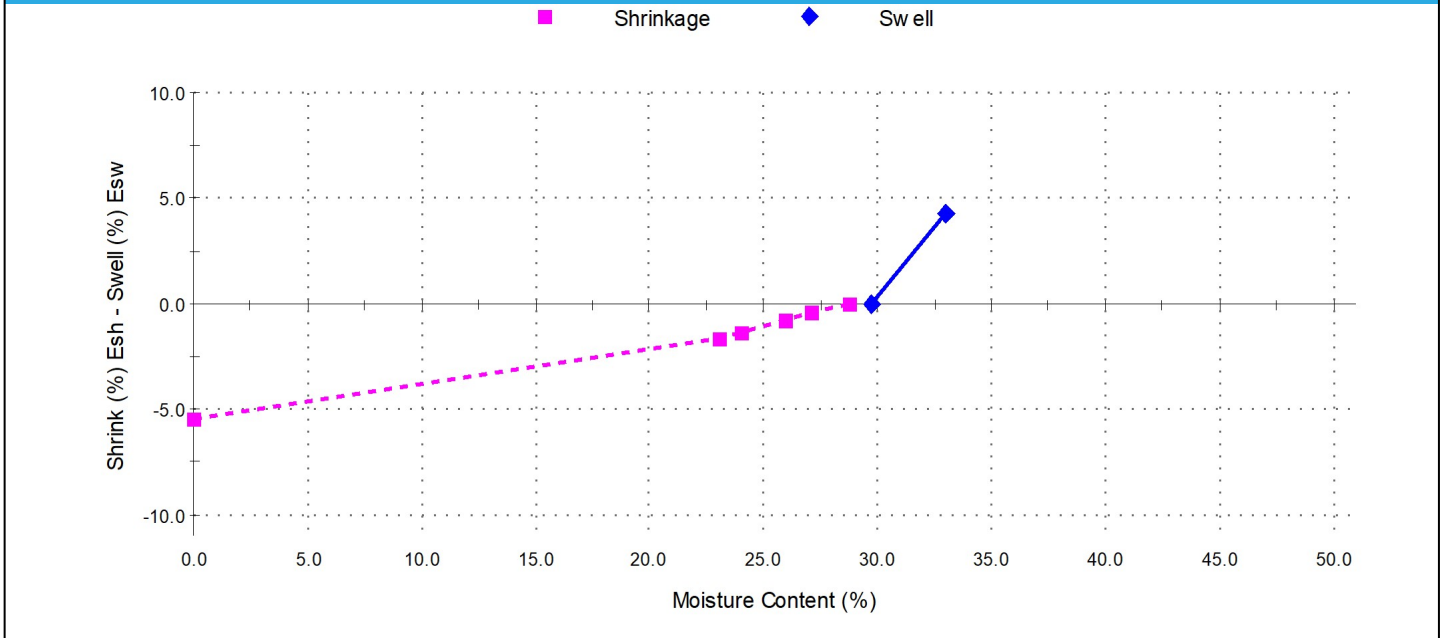

Shrink Swell Index - Iss (%): 4.2

Comments


Report No: SSI:NEW23W-1272-S14

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.


B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023

Sample Details

Sample ID: NEW23W-1272-S14
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Date Sampled: 13/03/2023
Source: On-Site Insitu
Date Submitted: 14/03/2023
Specification: No Specification
Sample Location: BH509 - (0.40 - 0.65m)
Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	3.5	Shrink on drying (%):	6.9
Moisture Content before (%):	30.8	Shrinkage Moisture Content (%):	31.9
Moisture Content after (%):	36.0	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	560	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	350	Cracking during shrinkage:	Major

Shrink Swell

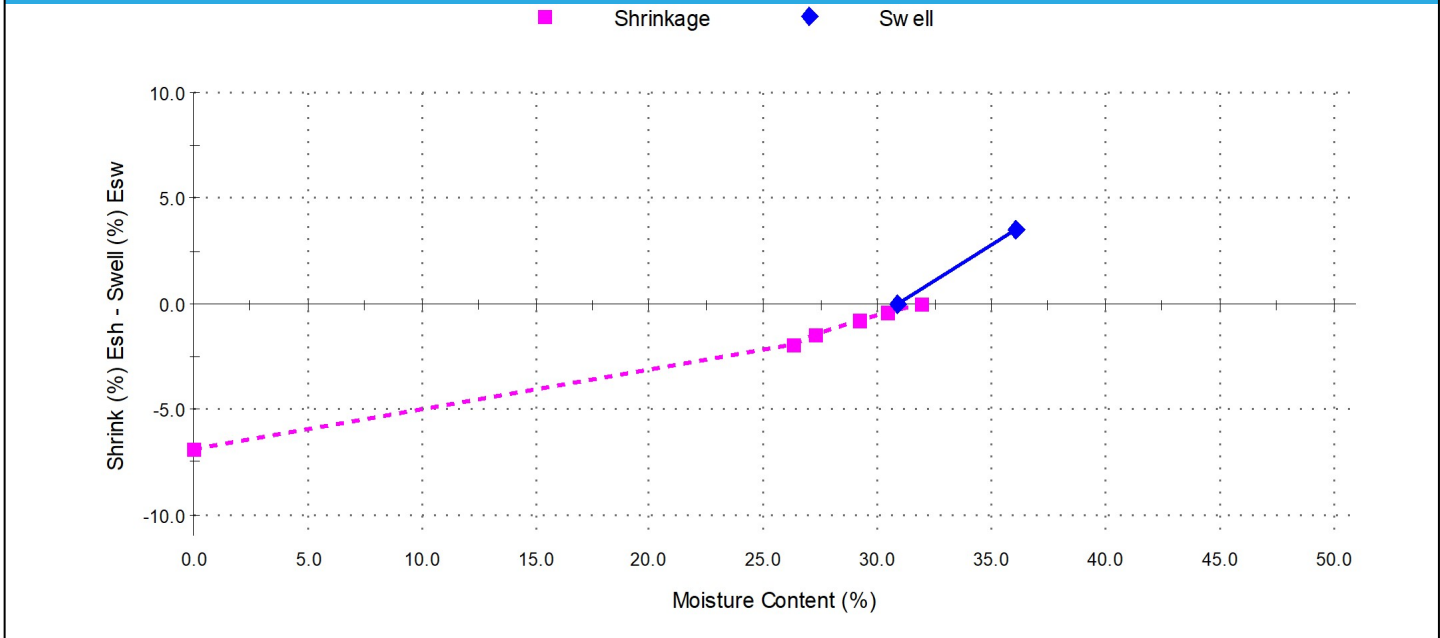

Shrink Swell Index - Iss (%): 4.8

Comments


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S15

Sampling Method: The results outlined below apply to the sample as received

Material: Clay **Date Sampled:** 13/03/2023

Source: On-Site Insitu **Date Submitted:** 14/03/2023


Specification: No Specification

Sample Location: BH509 - (1.00 - 1.30m)

Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	2.6	Shrink on drying (%):	6.7
Moisture Content before (%):	31.3	Shrinkage Moisture Content (%):	30.0
Moisture Content after (%):	31.9	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	330	Cracking during shrinkage:	Major

Shrink Swell

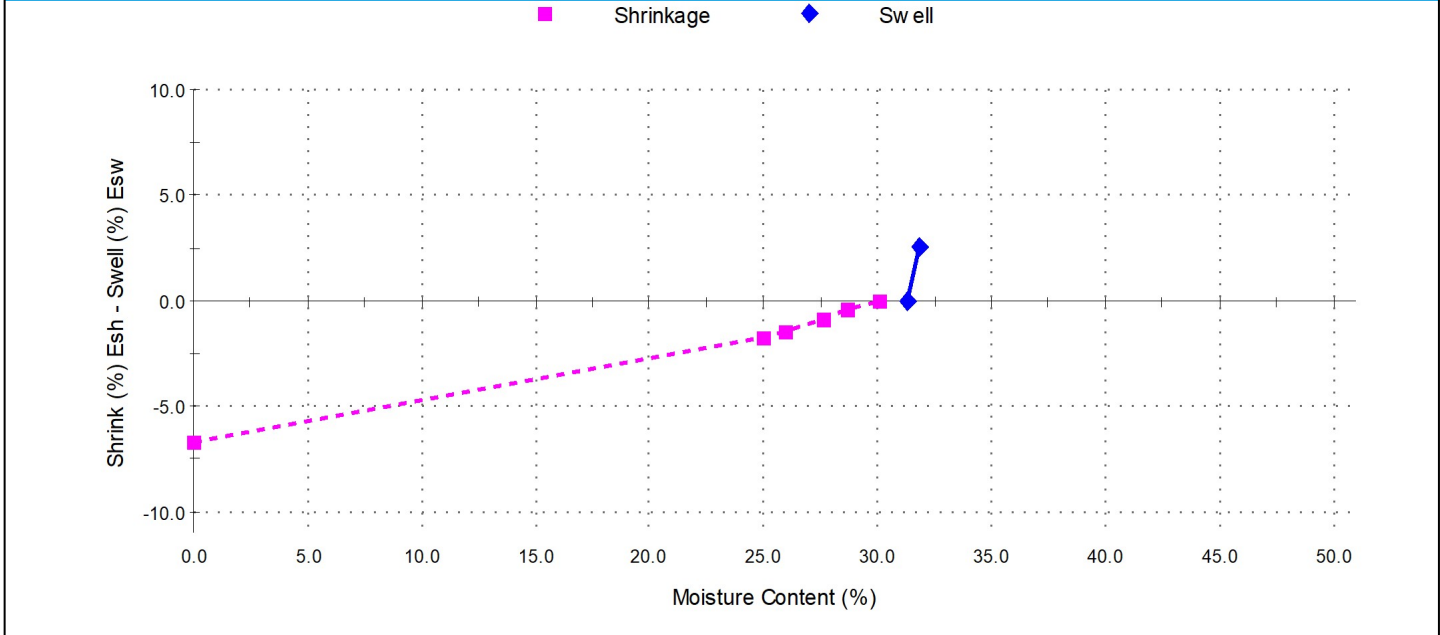

Shrink Swell Index - Iss (%): 4.4

Comments


Report No: SSI:NEW23W-1272-S16

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023


Sample Details

Sample ID: NEW23W-1272-S16
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Source: On-Site Insitu
Specification: No Specification
Sample Location: BH510 - (0.40 - 0.65m)
Date Tested: 15/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	8.2	Shrink on drying (%):	4.5
Moisture Content before (%):	27.5	Shrinkage Moisture Content (%):	26.9
Moisture Content after (%):	33.5	Est. inert material (%):	2%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	410	Cracking during shrinkage:	Moderate

Shrink Swell

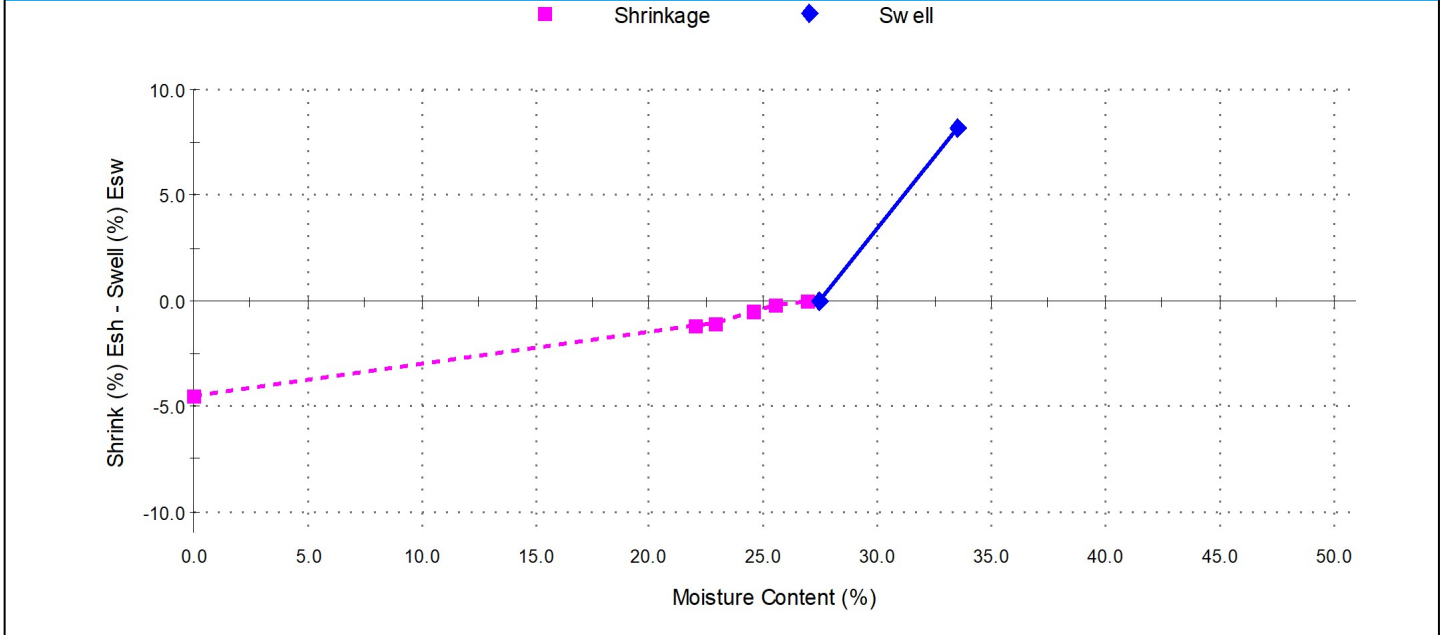

Shrink Swell Index - Iss (%): 4.7

Comments


Report No: SSI:NEW23W-1272-S17

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.


B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 12/04/2023

Sample Details

Sample ID: NEW23W-1272-S17
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Date Sampled: 13/03/2023
Source: On-Site Insitu
Date Submitted: 14/03/2023
Specification: No Specification
Sample Location: BH510 - (1.00 - 1.22m)
Date Tested: 15/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	5.0	Shrink on drying (%):	3.8
Moisture Content before (%):	27.9	Shrinkage Moisture Content (%):	27.0
Moisture Content after (%):	32.7	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	>600	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	320	Cracking during shrinkage:	Moderate

Shrink Swell

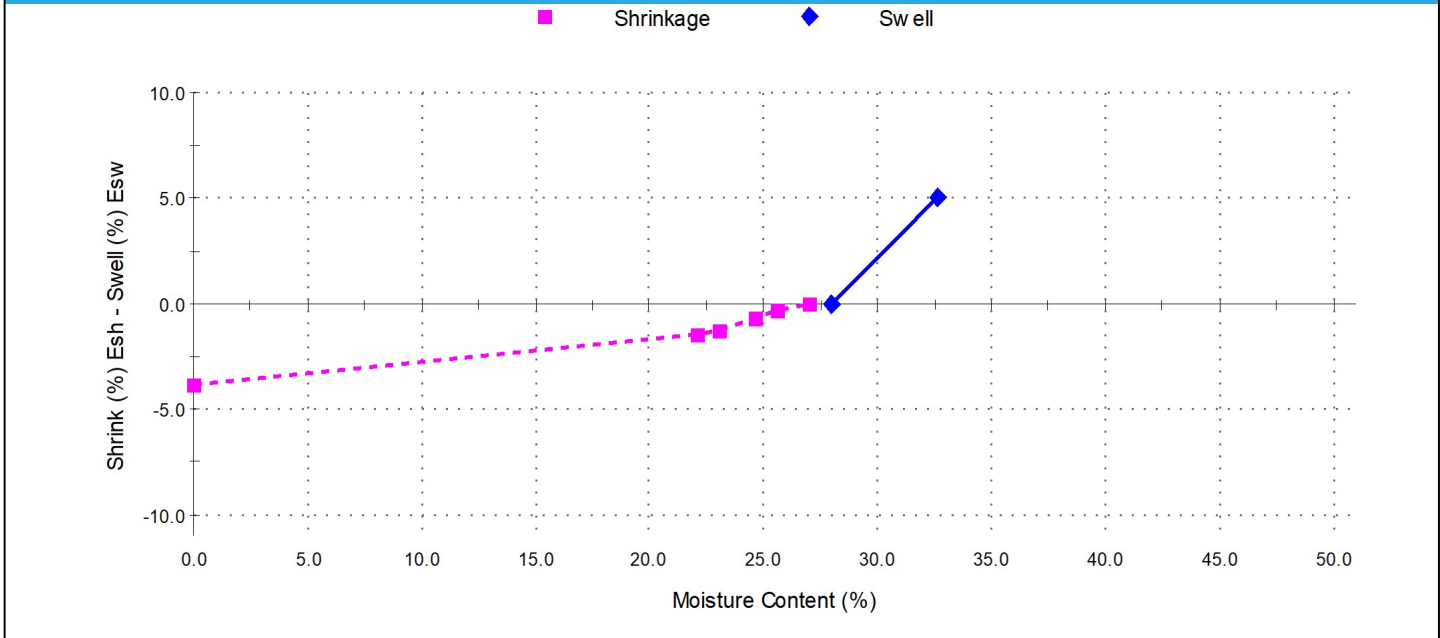

Shrink Swell Index - Iss (%): 3.5

Comments

Report No: SSI:NEW23W-1272-S18

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen

Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S18

Sampling Method: The results outlined below apply to the sample as received

Material: Sandy Clay

Source: On-Site Insitu

Specification: No Specification

Sample Location: BH501 - (2.20 - 2.30m)


Date Tested: 16/03/2023

Date Sampled: 13/03/2023

Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	0.2	Shrink on drying (%):	6.6
Moisture Content before (%):	36.8	Shrinkage Moisture Content (%):	33.4
Moisture Content after (%):	35.9	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	320	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	290	Cracking during shrinkage:	Moderate

Shrink Swell

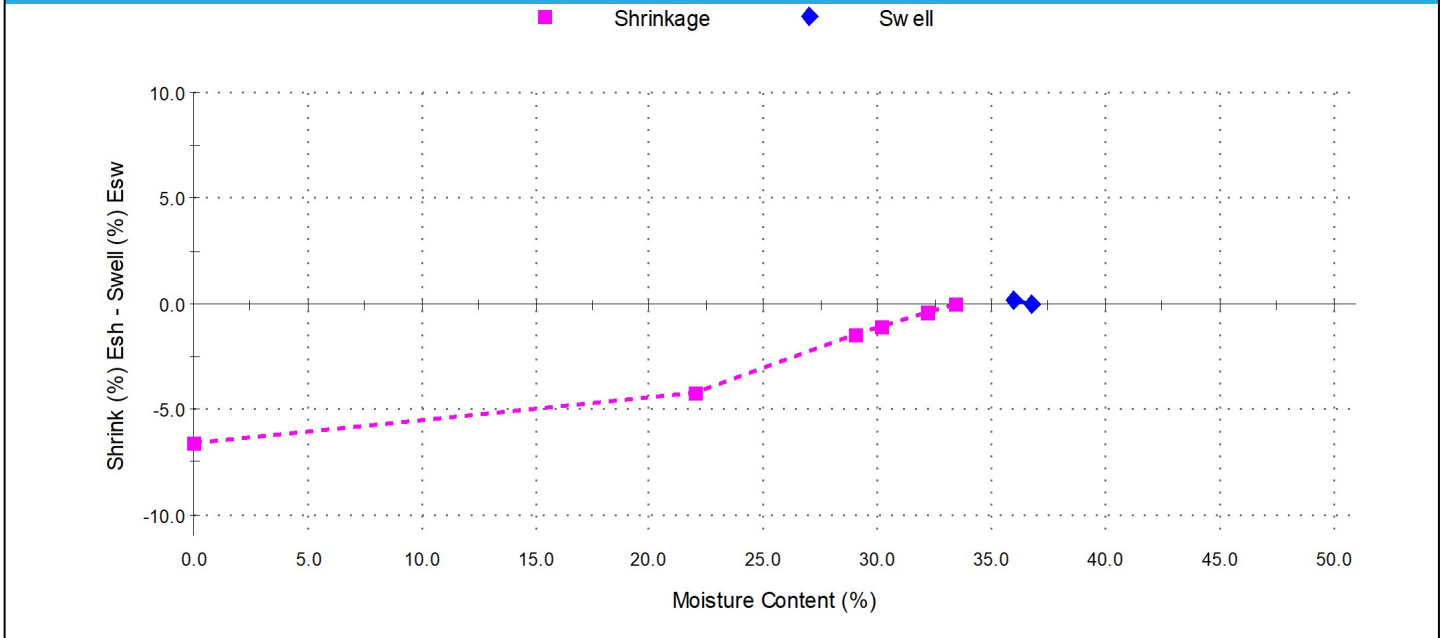

Shrink Swell Index - Iss (%): 3.7

Comments


Report No: SSI:NEW23W-1272-S19

Issue No: 1

Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038
Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5
Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
 Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 24/03/2023


Sample Details

Sample ID: NEW23W-1272-S19
Sampling Method: The results outlined below apply to the sample as received
Material: Clay
Source: On-Site Insitu
Specification: No Specification
Sample Location: BH505 - (2.50 - 2.70m)
Date Tested: 16/03/2023

Date Sampled: 13/03/2023
Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	3.8	Shrink on drying (%):	5.6
Moisture Content before (%):	33.3	Shrinkage Moisture Content (%):	30.8
Moisture Content after (%):	38.8	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	350	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	250	Cracking during shrinkage:	Major

Shrink Swell

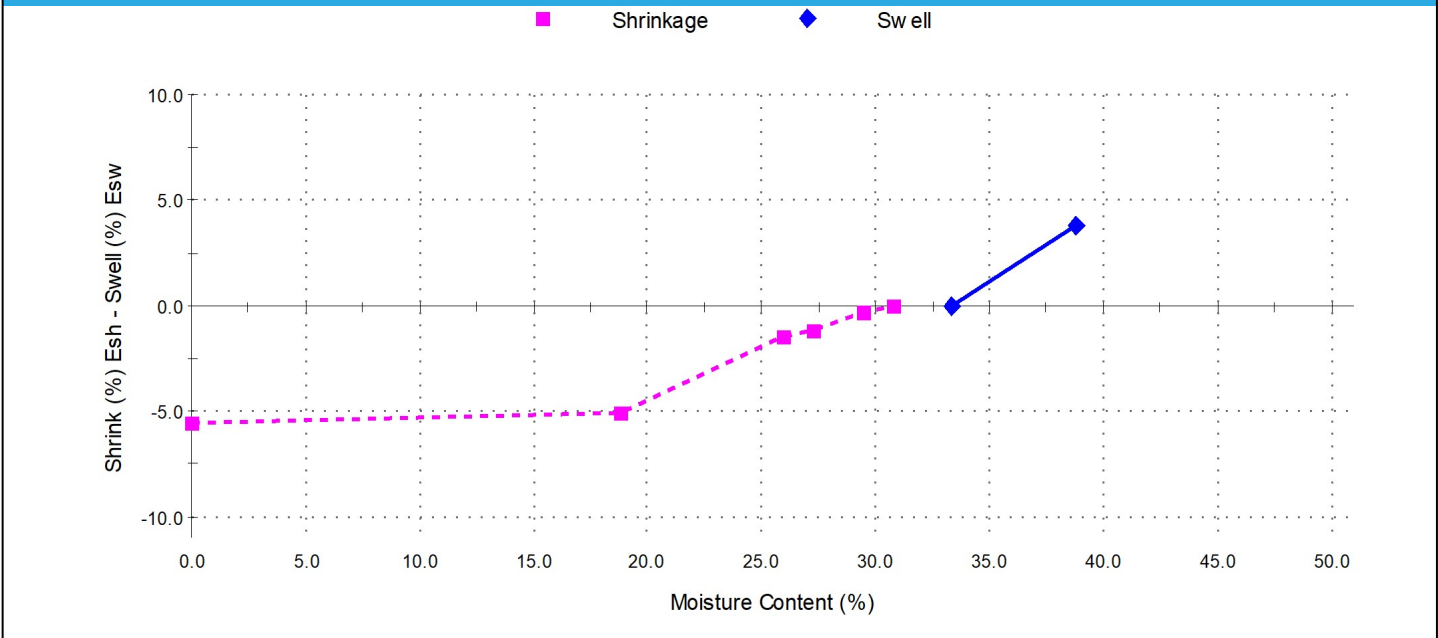

Shrink Swell Index - Iss (%): 4.2

Comments

Report No: SSI:NEW23W-1272-S20

Issue No: 1


Shrink Swell Index Report

Client: McCloy Project Management Pty Ltd
 PO Box 2214
 Dangar NSW 2309

Project No.: NEW23P-0038

Project Name: Proposed Subdivision - Kurrajong Estate, Stage 5

Project Location: Moobi Road, Scone, NSW



Accredited for compliance with ISO/IEC 17025-Testing. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Results provided relate only to the items tested or sampled.

B. Cullen
 Approved Signatory: Brent Cullen
 (Engineering Geologist)
 NATA Accredited Laboratory Number: 18686
 Date of Issue: 22/03/2023

Sample Details

Sample ID: NEW23W-1272-S20

Sampling Method: The results outlined below apply to the sample as received

Material: Sandy Clay

Source: On-Site Insitu

Specification: No Specification

Sample Location: BH508 - (2.20 - 2.30m)


Date Tested: 15/03/2023

Date Sampled: 13/03/2023

Date Submitted: 14/03/2023

Swell Test AS 1289.7.1.1		Shrink Test AS 1289.7.1.1	
Swell on Saturation (%):	0.5	Shrink on drying (%):	6.2
Moisture Content before (%):	37.5	Shrinkage Moisture Content (%):	35.8
Moisture Content after (%):	36.5	Est. inert material (%):	1%
Est. Unc. Comp. Strength before (kPa):	280	Crumbling during shrinkage:	Nil
Est. Unc. Comp. Strength after (kPa):	240	Cracking during shrinkage:	Moderate

Shrink Swell

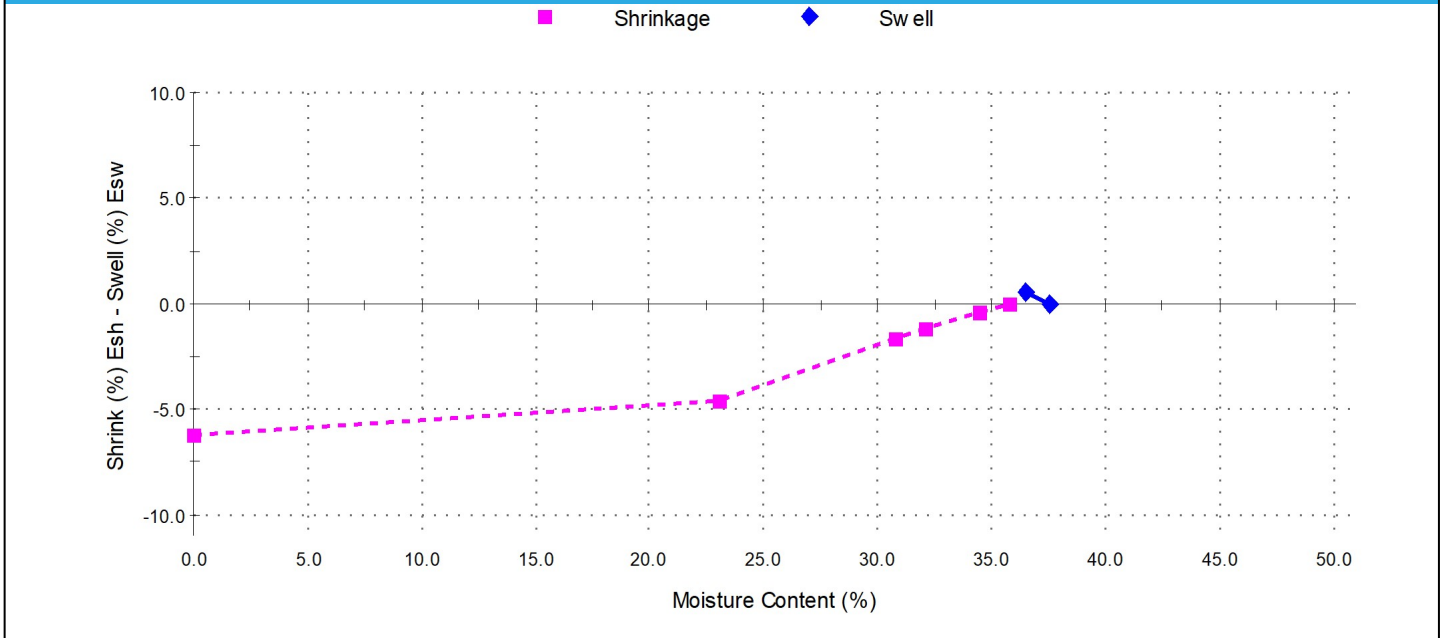

Shrink Swell Index - Iss (%): 3.6

Comments

APPENDIX C:

CSIRO Sheet BTF 18

**Foundation Maintenance and Footing
Performance: A Homeowner's Guide**

Foundation Maintenance and Footing Performance: A Homeowner's Guide



CSIRO

BTF 18
replaces
Information
Sheet 10/91

Buildings can and often do move. This movement can be up, down, lateral or rotational. The fundamental cause of movement in buildings can usually be related to one or more problems in the foundation soil. It is important for the homeowner to identify the soil type in order to ascertain the measures that should be put in place in order to ensure that problems in the foundation soil can be prevented, thus protecting against building movement.

This Building Technology File is designed to identify causes of soil-related building movement, and to suggest methods of prevention of resultant cracking in buildings.

Soil Types

The types of soils usually present under the topsoil in land zoned for residential buildings can be split into two approximate groups – granular and clay. Quite often, foundation soil is a mixture of both types. The general problems associated with soils having granular content are usually caused by erosion. Clay soils are subject to saturation and swell/shrink problems.

Classifications for a given area can generally be obtained by application to the local authority, but these are sometimes unreliable and if there is doubt, a geotechnical report should be commissioned. As most buildings suffering movement problems are founded on clay soils, there is an emphasis on classification of soils according to the amount of swell and shrinkage they experience with variations of water content. The table below is Table 2.1 from AS 2870, the Residential Slab and Footing Code.

Causes of Movement

Settlement due to construction

There are two types of settlement that occur as a result of construction:

- Immediate settlement occurs when a building is first placed on its foundation soil, as a result of compaction of the soil under the weight of the structure. The cohesive quality of clay soil mitigates against this, but granular (particularly sandy) soil is susceptible.
- Consolidation settlement is a feature of clay soil and may take place because of the expulsion of moisture from the soil or because of the soil's lack of resistance to local compressive or shear stresses. This will usually take place during the first few months after construction, but has been known to take many years in exceptional cases.

These problems are the province of the builder and should be taken into consideration as part of the preparation of the site for construction. Building Technology File 19 (BTF 19) deals with these problems.

Erosion

All soils are prone to erosion, but sandy soil is particularly susceptible to being washed away. Even clay with a sand component of say 10% or more can suffer from erosion.

Saturation

This is particularly a problem in clay soils. Saturation creates a bog-like suspension of the soil that causes it to lose virtually all of its bearing capacity. To a lesser degree, sand is affected by saturation because saturated sand may undergo a reduction in volume – particularly imported sand fill for bedding and blinding layers. However, this usually occurs as immediate settlement and should normally be the province of the builder.

Seasonal swelling and shrinkage of soil

All clays react to the presence of water by slowly absorbing it, making the soil increase in volume (see table below). The degree of increase varies considerably between different clays, as does the degree of decrease during the subsequent drying out caused by fair weather periods. Because of the low absorption and expulsion rate, this phenomenon will not usually be noticeable unless there are prolonged rainy or dry periods, usually of weeks or months, depending on the land and soil characteristics.

The swelling of soil creates an upward force on the footings of the building, and shrinkage creates subsidence that takes away the support needed by the footing to retain equilibrium.

Shear failure

This phenomenon occurs when the foundation soil does not have sufficient strength to support the weight of the footing. There are two major post-construction causes:

- Significant load increase.
- Reduction of lateral support of the soil under the footing due to erosion or excavation.
- In clay soil, shear failure can be caused by saturation of the soil adjacent to or under the footing.

GENERAL DEFINITIONS OF SITE CLASSES

Class	Foundation
A	Most sand and rock sites with little or no ground movement from moisture changes
S	Slightly reactive clay sites with only slight ground movement from moisture changes
M	Moderately reactive clay or silt sites, which can experience moderate ground movement from moisture changes
H	Highly reactive clay sites, which can experience high ground movement from moisture changes
E	Extremely reactive sites, which can experience extreme ground movement from moisture changes
A to P	Filled sites
P	Sites which include soft soils, such as soft clay or silt or loose sands; landslip; mine subsidence; collapsing soils; soils subject to erosion; reactive sites subject to abnormal moisture conditions or sites which cannot be classified otherwise

Tree root growth

Trees and shrubs that are allowed to grow in the vicinity of footings can cause foundation soil movement in two ways:

- Roots that grow under footings may increase in cross-sectional size, exerting upward pressure on footings.
- Roots in the vicinity of footings will absorb much of the moisture in the foundation soil, causing shrinkage or subsidence.

Unevenness of Movement

The types of ground movement described above usually occur unevenly throughout the building's foundation soil. Settlement due to construction tends to be uneven because of:

- Differing compaction of foundation soil prior to construction.
- Differing moisture content of foundation soil prior to construction.

Movement due to non-construction causes is usually more uneven still. Erosion can undermine a footing that traverses the flow or can create the conditions for shear failure by eroding soil adjacent to a footing that runs in the same direction as the flow.

Saturation of clay foundation soil may occur where subfloor walls create a dam that makes water pond. It can also occur wherever there is a source of water near footings in clay soil. This leads to a severe reduction in the strength of the soil which may create local shear failure.

Seasonal swelling and shrinkage of clay soil affects the perimeter of the building first, then gradually spreads to the interior. The swelling process will usually begin at the uphill extreme of the building, or on the weather side where the land is flat. Swelling gradually reaches the interior soil as absorption continues. Shrinkage usually begins where the sun's heat is greatest.

Effects of Uneven Soil Movement on Structures

Erosion and saturation

Erosion removes the support from under footings, tending to create subsidence of the part of the structure under which it occurs. Brickwork walls will resist the stress created by this removal of support by bridging the gap or cantilevering until the bricks or the mortar bedding fail. Older masonry has little resistance. Evidence of failure varies according to circumstances and symptoms may include:

- Step cracking in the mortar beds in the body of the wall or above/below openings such as doors or windows.
- Vertical cracking in the bricks (usually but not necessarily in line with the vertical beds or perpend).

Isolated piers affected by erosion or saturation of foundations will eventually lose contact with the bearers they support and may tilt or fall over. The floors that have lost this support will become bouncy, sometimes rattling ornaments etc.

Seasonal swelling/shrinkage in clay

Swelling foundation soil due to rainy periods first lifts the most exposed extremities of the footing system, then the remainder of the perimeter footings while gradually permeating inside the building footprint to lift internal footings. This swelling first tends to create a dish effect, because the external footings are pushed higher than the internal ones.

The first noticeable symptom may be that the floor appears slightly dished. This is often accompanied by some doors binding on the floor or the door head, together with some cracking of cornice mitres. In buildings with timber flooring supported by bearers and joists, the floor can be bouncy. Externally there may be visible dishing of the hip or ridge lines.

As the moisture absorption process completes its journey to the innermost areas of the building, the internal footings will rise. If the spread of moisture is roughly even, it may be that the symptoms will temporarily disappear, but it is more likely that swelling will be uneven, creating a difference rather than a disappearance in symptoms. In buildings with timber flooring supported by bearers and joists, the isolated piers will rise more easily than the strip footings or piers under walls, creating noticeable doming of flooring.

Trees can cause shrinkage and damage



As the weather pattern changes and the soil begins to dry out, the external footings will be first affected, beginning with the locations where the sun's effect is strongest. This has the effect of lowering the external footings. The doming is accentuated and cracking reduces or disappears where it occurred because of dishing, but other cracks open up. The roof lines may become convex.

Doming and dishing are also affected by weather in other ways. In areas where warm, wet summers and cooler dry winters prevail, water migration tends to be toward the interior and doming will be accentuated, whereas where summers are dry and winters are cold and wet, migration tends to be toward the exterior and the underlying propensity is toward dishing.

Movement caused by tree roots

In general, growing roots will exert an upward pressure on footings, whereas soil subject to drying because of tree or shrub roots will tend to remove support from under footings by inducing shrinkage.

Complications caused by the structure itself

Most forces that the soil causes to be exerted on structures are vertical – i.e. either up or down. However, because these forces are seldom spread evenly around the footings, and because the building resists uneven movement because of its rigidity, forces are exerted from one part of the building to another. The net result of all these forces is usually rotational. This resultant force often complicates the diagnosis because the visible symptoms do not simply reflect the original cause. A common symptom is binding of doors on the vertical member of the frame.

Effects on full masonry structures

Brickwork will resist cracking where it can. It will attempt to span areas that lose support because of subsided foundations or raised points. It is therefore usual to see cracking at weak points, such as openings for windows or doors.

In the event of construction settlement, cracking will usually remain unchanged after the process of settlement has ceased.

With local shear or erosion, cracking will usually continue to develop until the original cause has been remedied, or until the subsidence has completely neutralised the affected portion of footing and the structure has stabilised on other footings that remain effective.

In the case of swell/shrink effects, the brickwork will in some cases return to its original position after completion of a cycle, however it is more likely that the rotational effect will not be exactly reversed, and it is also usual that brickwork will settle in its new position and will resist the forces trying to return it to its original position. This means that in a case where swelling takes place after construction and cracking occurs, the cracking is likely to at least partly remain after the shrink segment of the cycle is complete. Thus, each time the cycle is repeated, the likelihood is that the cracking will become wider until the sections of brickwork become virtually independent.

With repeated cycles, once the cracking is established, if there is no other complication, it is normal for the incidence of cracking to stabilise, as the building has the articulation it needs to cope with the problem. This is by no means always the case, however, and monitoring of cracks in walls and floors should always be treated seriously.

Upheaval caused by growth of tree roots under footings is not a simple vertical shear stress. There is a tendency for the root to also exert lateral forces that attempt to separate sections of brickwork after initial cracking has occurred.

The normal structural arrangement is that the inner leaf of brickwork in the external walls and at least some of the internal walls (depending on the roof type) comprise the load-bearing structure on which any upper floors, ceilings and the roof are supported. In these cases, it is internally visible cracking that should be the main focus of attention, however there are a few examples of dwellings whose external leaf of masonry plays some supporting role, so this should be checked if there is any doubt. In any case, externally visible cracking is important as a guide to stresses on the structure generally, and it should also be remembered that the external walls must be capable of supporting themselves.

Effects on framed structures

Timber or steel framed buildings are less likely to exhibit cracking due to swell/shrink than masonry buildings because of their flexibility. Also, the doming/dishing effects tend to be lower because of the lighter weight of walls. The main risks to framed buildings are encountered because of the isolated pier footings used under walls. Where erosion or saturation cause a footing to fall away, this can double the span which a wall must bridge. This additional stress can create cracking in wall linings, particularly where there is a weak point in the structure caused by a door or window opening. It is, however, unlikely that framed structures will be so stressed as to suffer serious damage without first exhibiting some or all of the above symptoms for a considerable period. The same warning period should apply in the case of upheaval. It should be noted, however, that where framed buildings are supported by strip footings there is only one leaf of brickwork and therefore the externally visible walls are the supporting structure for the building. In this case, the subfloor masonry walls can be expected to behave as full brickwork walls.

Effects on brick veneer structures

Because the load-bearing structure of a brick veneer building is the frame that makes up the interior leaf of the external walls plus perhaps the internal walls, depending on the type of roof, the building can be expected to behave as a framed structure, except that the external masonry will behave in a similar way to the external leaf of a full masonry structure.

Water Service and Drainage

Where a water service pipe, a sewer or stormwater drainage pipe is in the vicinity of a building, a water leak can cause erosion, swelling or saturation of susceptible soil. Even a minuscule leak can be enough to saturate a clay foundation. A leaking tap near a building can have the same effect. In addition, trenches containing pipes can become watercourses even though backfilled, particularly where broken rubble is used as fill. Water that runs along these trenches can be responsible for serious erosion, interstrata seepage into subfloor areas and saturation.

Pipe leakage and trench water flows also encourage tree and shrub roots to the source of water, complicating and exacerbating the problem.

Poor roof plumbing can result in large volumes of rainwater being concentrated in a small area of soil:

- Incorrect falls in roof guttering may result in overflows, as may gutters blocked with leaves etc.

- Corroded guttering or downpipes can spill water to ground.
- Downpipes not positively connected to a proper stormwater collection system will direct a concentration of water to soil that is directly adjacent to footings, sometimes causing large-scale problems such as erosion, saturation and migration of water under the building.

Seriousness of Cracking

In general, most cracking found in masonry walls is a cosmetic nuisance only and can be kept in repair or even ignored. The table below is a reproduction of Table C1 of AS 2870.

AS 2870 also publishes figures relating to cracking in concrete floors, however because wall cracking will usually reach the critical point significantly earlier than cracking in slabs, this table is not reproduced here.

Prevention/Cure

Plumbing

Where building movement is caused by water service, roof plumbing, sewer or stormwater failure, the remedy is to repair the problem. It is prudent, however, to consider also rerouting pipes away from the building where possible, and relocating taps to positions where any leakage will not direct water to the building vicinity. Even where gully traps are present, there is sometimes sufficient spill to create erosion or saturation, particularly in modern installations using smaller diameter PVC fixtures. Indeed, some gully traps are not situated directly under the taps that are installed to charge them, with the result that water from the tap may enter the backfilled trench that houses the sewer piping. If the trench has been poorly backfilled, the water will either pond or flow along the bottom of the trench. As these trenches usually run alongside the footings and can be at a similar depth, it is not hard to see how any water that is thus directed into a trench can easily affect the foundation's ability to support footings or even gain entry to the subfloor area.

Ground drainage

In all soils there is the capacity for water to travel on the surface and below it. Surface water flows can be established by inspection during and after heavy or prolonged rain. If necessary, a grated drain system connected to the stormwater collection system is usually an easy solution.

It is, however, sometimes necessary when attempting to prevent water migration that testing be carried out to establish watertable height and subsoil water flows. This subject is referred to in BTF 19 and may properly be regarded as an area for an expert consultant.


Protection of the building perimeter

It is essential to remember that the soil that affects footings extends well beyond the actual building line. Watering of garden plants, shrubs and trees causes some of the most serious water problems.

For this reason, particularly where problems exist or are likely to occur, it is recommended that an apron of paving be installed around as much of the building perimeter as necessary. This paving

CLASSIFICATION OF DAMAGE WITH REFERENCE TO WALLS

Description of typical damage and required repair	Approximate crack width limit (see Note 3)	Damage category
Hairline cracks	<0.1 mm	0
Fine cracks which do not need repair	<1 mm	1
Cracks noticeable but easily filled. Doors and windows stick slightly	<5 mm	2
Cracks can be repaired and possibly a small amount of wall will need to be replaced. Doors and windows stick. Service pipes can fracture. Weathertightness often impaired	5–15 mm (or a number of cracks 3 mm or more in one group)	3
Extensive repair work involving breaking-out and replacing sections of walls, especially over doors and windows. Window and door frames distort. Walls lean or bulge noticeably, some loss of bearing in beams. Service pipes disrupted	15–25 mm but also depend on number of cracks	4

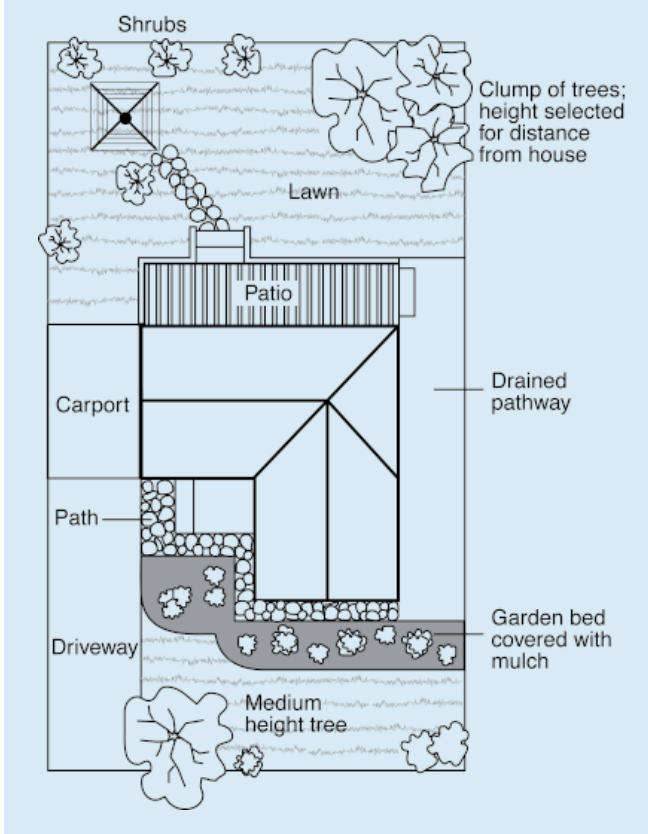

- Water that is transmitted into masonry, metal or timber building elements causes damage and/or decay to those elements.
- High subfloor humidity and moisture content create an ideal environment for various pests, including termites and spiders.
- Where high moisture levels are transmitted to the flooring and walls, an increase in the dust mite count can ensue within the living areas. Dust mites, as well as dampness in general, can be a health hazard to inhabitants, particularly those who are abnormally susceptible to respiratory ailments.

The garden

The ideal vegetation layout is to have lawn or plants that require only light watering immediately adjacent to the drainage or paving edge, then more demanding plants, shrubs and trees spread out in that order.

Overwatering due to misuse of automatic watering systems is a common cause of saturation and water migration under footings. If it is necessary to use these systems, it is important to remove garden beds to a completely safe distance from buildings.

Existing trees

Where a tree is causing a problem of soil drying or there is the existence or threat of upheaval of footings, if the offending roots are subsidiary and their removal will not significantly damage the tree, they should be severed and a concrete or metal barrier placed vertically in the soil to prevent future root growth in the direction of the building. If it is not possible to remove the relevant roots without damage to the tree, an application to remove the tree should be made to the local authority. A prudent plan is to transplant likely offenders before they become a problem.

Information on trees, plants and shrubs

State departments overseeing agriculture can give information regarding root patterns, volume of water needed and safe distance from buildings of most species. Botanic gardens are also sources of information. For information on plant roots and drains, see Building Technology File 17.

Excavation

Excavation around footings must be properly engineered. Soil supporting footings can only be safely excavated at an angle that allows the soil under the footing to remain stable. This angle is called the angle of repose (or friction) and varies significantly between soil types and conditions. Removal of soil within the angle of repose will cause subsidence.

Remediation

Where erosion has occurred that has washed away soil adjacent to footings, soil of the same classification should be introduced and compacted to the same density. Where footings have been undermined, augmentation or other specialist work may be required. Remediation of footings and foundations is generally the realm of a specialist consultant.

Where isolated footings rise and fall because of swell/shrink effect, the homeowner may be tempted to alleviate floor bounce by filling the gap that has appeared between the bearer and the pier with blocking. The danger here is that when the next swell segment of the cycle occurs, the extra blocking will push the floor up into an accentuated dome and may also cause local shear failure in the soil. If it is necessary to use blocking, it should be by a pair of fine wedges and monitoring should be carried out fortnightly.

This BTF was prepared by John Lewer FAIB, MIAMA, Partner, Construction Diagnosis.

should extend outwards a minimum of 900 mm (more in highly reactive soil) and should have a minimum fall away from the building of 1:60. The finished paving should be no less than 100 mm below brick vent bases.

It is prudent to relocate drainage pipes away from this paving, if possible, to avoid complications from future leakage. If this is not practical, earthenware pipes should be replaced by PVC and backfilling should be of the same soil type as the surrounding soil and compacted to the same density.

Except in areas where freezing of water is an issue, it is wise to remove taps in the building area and relocate them well away from the building – preferably not uphill from it (see BTF 19).

It may be desirable to install a grated drain at the outside edge of the paving on the uphill side of the building. If subsoil drainage is needed this can be installed under the surface drain.

Condensation

In buildings with a subfloor void such as where bearers and joists support flooring, insufficient ventilation creates ideal conditions for condensation, particularly where there is little clearance between the floor and the ground. Condensation adds to the moisture already present in the subfloor and significantly slows the process of drying out. Installation of an adequate subfloor ventilation system, either natural or mechanical, is desirable.

Warning: Although this Building Technology File deals with cracking in buildings, it should be said that subfloor moisture can result in the development of other problems, notably:

The information in this and other issues in the series was derived from various sources and was believed to be correct when published.

The information is advisory. It is provided in good faith and not claimed to be an exhaustive treatment of the relevant subject.

Further professional advice needs to be obtained before taking any action based on the information provided.

Distributed by

CSIRO PUBLISHING PO Box 1139, Collingwood 3066, Australia

Freecall 1800 645 051 Tel (03) 9662 7666 Fax (03) 9662 7555 www.publish.csiro.au

Email: publishing.sales@csiro.au

© CSIRO 2003. Unauthorised copying of this Building Technology file is prohibited